Specifications





## Modular timing relay, 8 A, 1 CO, 1 s..100 h, time delay, 12...240 V AC/DC

Local distributor code: 397857403

RE17RMMW

#### EAN Code: 3606480552762

### Main

Range Of Product	Harmony Timer Relays
Product Or Component Type	Multifunction relay
Discrete Output Type	Relay
Width	17.5 mm
Device Short Name	RE17R
Time Delay Type	Power on-delay On-delay and off-delay Interval Off-delay Symmetrical flashing
Time Delay Range	110 h 0.11 s 660 s 10100 h 660 min 110 s 110 min
Nominal Output Current	8 A

### Complementary

· · · · · · · · · · · · · · · · · ·		
Contacts Type And Composition	1 C/O	
Contacts Material	Cadmium free	
Height	90 mm	
Depth	72 mm	
Control Type	Selector switch front panel	
[Us] Rated Supply Voltage	12240 V AC/DC 50/60 Hz	
Voltage Range	0.851.1 Us	
Supply Frequency	5060 Hz +/- 5 %	
Release Of Input Voltage	5 V	
Connections - Terminals	Screw terminals, $1 \times 0.51 \times 3.3 \text{ mm}^2$ (AWG 20AWG 12) solid without cable end Screw terminals, $2 \times 0.52 \times 2.5 \text{ mm}^2$ (AWG 20AWG 14) solid without cable end Screw terminals, $1 \times 0.21 \times 2.5 \text{ mm}^2$ (AWG 24AWG 14) flexible with cable end Screw terminals, $2 \times 0.22 \times 1.5 \text{ mm}^2$ (AWG 24AWG 16) flexible with cable end	
Tightening Torque	0.61 N.m conforming to IEC 60947-1	
Housing Material	Self-extinguishing	
Repeat Accuracy	+/- 0.5 % conforming to IEC 61812-1	
Temperature Drift	+/- 0.05 %/°C	
Voltage Drift	+/- 0.2 %/V	

Setting Accuracy Of Time Delay	+/- 10 % of full scale at 25 °C conforming to IEC 61812-1
Control Signal Pulse Width	100 ms with load in parallel typical 30 ms typical
Insulation Resistance	100 MOhm at 500 V DC conforming to IEC 60664-1
Reset Time	120 ms on de-energisation typical
On-Load Factor	100 %
Power Consumption In Va	03 VA at 240 V AC
Maximum Power Consumption In W	1.5 W at 240 V DC
Minimum Switching Current	10 mA at 5 V DC
Maximum Switching Current	8 A AC/DC
Maximum Switching Voltage	250 V AC
Breaking Capacity	2000 VA
Operating Frequency	10 Hz
Electrical Durability	100000 cycles (8 A at 250 V AC maximum) for resistive load
Mechanical Durability	1000000 cycles
Dielectric Strength	2.5 kV 1 mA/1 minute 50 Hz conforming to IEC 61812-1
[Uimp] Rated Impulse Withstand Voltage	5 kV during 1.2/50 μs
Power On Delay	100 ms
Marking	CE
Creepage Distance	4 kV/3 conforming to IEC 60664-1
Safety Reliability Data	MTTFd = 296.8 years B10d = 270000
Mounting Position	Any position in relation to normal vertical mounting plane
Mounting Support	35 mm DIN rail conforming to IEC 60715
Local Signalling	LED indicator for on steady: relay energised, no timing in progress LED indicator for flashing: timing in progress 80 % ON and 20 % OFF LED indicator for pulsing: relay de-energised, no timing in progress (except function Di-D, Li-L) 5 % ON and 95 % OFF
Net Weight	0.07 kg
Number Of Functions	10
Time Delay Type	A, Ac, At, B, Bw, C, D, Di, H, Ht
Functionality	Multifunction
Compatibility Code	RE17

### Environment

Immunity To Microbreaks	20 ms
Standards	2006/95/EC
	IEC 61000-6-3
	IEC 61812-1
	IEC 61000-6-2
	IEC 61000-6-1
	2004/108/EC
	IEC 61000-6-4
Product Certifications	CSA
	GL
	cULus
Ambient Air Temperature For Storage	-3060 °C

Ambient Air Temperature For Operation	-2060 °C
Ip Degree Of Protection	IP20 (terminal block) conforming to IEC 60529 IP40 (housing) conforming to IEC 60529 IP50 (front panel) conforming to IEC 60529
Vibration Resistance	20 m/s <sup>2</sup> (f= 10150 Hz) conforming to IEC 60068-2-6
Shock Resistance	15 gn for 11 ms conforming to IEC 60068-2-27
Relative Humidity	93 % without condensation conforming to IEC 60068-2-30
Electromagnetic Compatibility	Electrostatic discharge immunity test: (in contact), level 3, 6 kV, conforming to IEC 61000-4-2 Electrostatic discharge immunity test: (in air), level 3, 8 kV, conforming to IEC 61000-4-2 Susceptibility to electromagnetic fields: (80 MHz to 1 GHz), level 3, 10 V/m, conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test: (capacitive connecting clip), level 3, 1 kV, conforming to IEC 61000-4-4 Electrical fast transient/burst immunity test: (direct), level 3, 2 kV, conforming to IEC 61000-4-4 I.2/50 µs shock waves immunity test: (differential mode), level 3, 1 kV, conforming to IEC 61000-4-5 1.2/50 µs shock waves immunity test: (common mode), level 3, 2 kV, conforming to IEC 61000-4-5 Voltage dips and interruptions immunity test: (1 cycle), 0 %, conforming to IEC 61000-4-11 Voltage dips and interruptions immunity test: (25/30 cycles), 70 %, conforming to IEC 61000-4-11 Conducted and radiated emissions: , class B, conforming to EN 55022

## **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.700 cm
Package 1 Width	8.000 cm
Package 1 Length	9.500 cm
Package 1 Weight	80.000 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	40
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	3.735 kg
Unit Type Of Package 3	P06
Number Of Units In Package 3	640
Package 3 Height	75.000 cm
Package 3 Width	60.000 cm
Package 3 Length	80.000 cm
Package 3 Weight	70.000 kg

### **Contractual warranty**

Warranty

18 months

## Sustainability Screen Premium

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Yes

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

### Well-being performance




Rohs Exemption Information

### **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information


### **Dimensions Drawings**

#### Width 17.5 mm

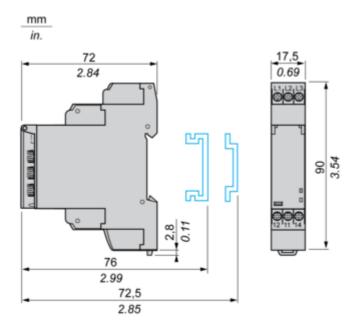


Connections and Schema

### Internal Wiring Diagram

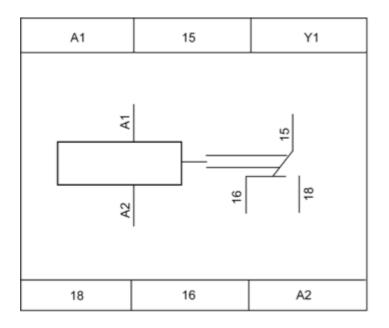

#### Wiring Diagram



1) Contact Y1:

- $_{\bullet}\,$  Control for functions B, C, Ac, Bw, Ad, Ah, N, O, W, T, Tt.
- Partial stop for functions At, Ht and Pt.
- Function D if Di selected.
- Not used for functions A, H and P.


### **Technical Description**

#### Function A : Power on Delay Relay


#### Description

The timing period T begins on energisation. After timing, the output(s) R close(s). The second output can be either timed or instantaneous.

#### Function: 1 Output



#### Function: 2 Outputs




#### Function Ac: On-Delay & Off-Delay with Control Signal


#### Description

After energisation of power supply and energization of Y1 causes the timing period T to start. At the end of this timing period, the output(s) R close(s). When deenergization of Y1, the timing T starts. At the end of this timing period T,the output(s) R revert(s) to its/their initial position. The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").

#### Function: 1 Output



#### **Function: 2 Outputs**




### **RE17RMMW**

#### Function At : Power on Delay Relay (Summation) with Control Signal

#### Description

After power-up, the first opening of control contact C starts the timing. Timing can be interrupted each time control contact closes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output relay closes.

#### Function: 1 Output




T = t1 + t2 + ...

#### Function B : Interval Relay with Control Signal

#### Description

After power-up, pulsing or maintaining control contact C starts the timing T. The output R closes for the duration of the timing period T then reverts to its initial state.

#### Function: 1 Output




#### Function Bw : Double Interval Relay with Control Signal

#### Description

On closing and opening of control contact C, the output R closes for the duration of the timing period T.

#### Function: 1 Output




#### Function C : Off-Delay Relay with Control Signal


#### Description

After power-up and closing of the control contact C, the output R closes. When control contact C re-opens, timing T starts. At the end of the timing period, the output(s) R revert(s) to its/their initial state. The second output can be either timed or instantaneous.

#### Function: 1 Output



#### **Function: 2 Outputs**




#### Function D: Symmetrical Flashing Relay (Starting Pulse Off)


#### Description

On energisation of power supply, output(s) R starts at its/their initial state for timing duration T then change(s) to output(s) R close(s) for the same timing duration T.This cycle is repeated indefinitely until power supply removal. Specially for RE17\*, RE22R2AMU, RE22R2MMW, RE22R2MMU, RE22R2MJU, this D function can only be initiated by energizing Y1 permanently.The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


#### Function: 1 Output




#### **Function: 2 Outputs**



#### Function: 1 Output with Retrigger / Restart Control



Function: 2 Output with Retrigger / Restart Control



#### Function Di : Symmetrical Flasher Relay (Starting Pulse On)

#### Description


Repetitive cycle with two timing periods T of equal duration, with output(s) R changing state at the end of each timing period T.

The second output can be either timed or instantaneous.

#### Function: 1 Output



#### Function: 2 Outputs



#### Function H : Interval Relay


#### Description

On energisation of the relay, timing period T starts and the output(s) R close(s). At the end of the timing period T, the output(s) R revert(s) to its/their initial state. The second output can be either timed or instantaneous.

#### Function: 1 Output



#### Function: 2 Outputs



#### Function Ht: Interval Relay & With Pause / Summation Control

#### Description

On energisation of power supply, output(s) R close(s) and timing period T starts.


The timing can be interrupted / paused each time X1 energizes.

When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state Reenergization of X1 will also cause output(s) R close(s) if the time has elapsed and restart the same operation as described at the beginning.

Except for RE17\*, RE22R2MMW, RENF22R2MMW, RE22R2MMU and RE22R2MJU, timing can be interrupted / paused each time Y1 energizes.


The second output (R2) can be either timed (when set to "TIMED" or instantaneous (when set to "INST").

#### Function: 1 Output






#### Function: 2 Outputs




T = t1 + t2 + ...

Function: 1 Output with Retrigger / Restart Control





Function: 2 Outputs with Retrigger / Restart Control



T = t1 + t2 +...

#### Legend

	Relay de-energised	
	Relay energised	
	Output open	
	Output closed	
с	Control contact	
G	Gate	
R	Relay or solid state output	
R1/R2	2 timed outputs	
R2 inst.	The second output is instantaneous if the right position is selected	
т	Timing period	
Ta -	Adjustable On-delay	
Tr -	Adjustable Off-delay	
υ	Supply	