# **Product datasheet**

Specification





# Modular 1-phase voltage control relay, 5 A, 1 CO, 65...260 V AC/DC

Local distributor code:

389834845 RM17UBE15

EAN Code: 3389119405140

#### Main

Range Of Product	Harmony Control Relays
Relay Type	Voltage control relay
Product Or Component Type	Voltage control relay
Product Specific Application	For single-phase and DC supply
Relay Name	RM17UBE
Relay Monitored Parameters	Self-powered Overvoltage and undervoltage detection
Time Delay	Adjustable 0.110 s, 0 + 10 % Tt- time delay upon fault
Switching Capacity In Va	1250 VA
Measurement Range	65260 V AC/DC
Contacts Type And Composition	1 C/O

## Complementary

Reset Time	1500 ms time delay
Maximum Switching Voltage	250 V AC/DC
Minimum Switching Current	10 mA at 5 V DC
Maximum Switching Current	5 A AC/DC
Supply Voltage Limits	50270 V AC/DC
Power Consumption In Va	03 VA AC
Maximum Power Consumption In W	1 W DC
Control Circuit Frequency	5060 Hz +/- 10 %
Immunity To Microbreaks	20 ms
Output Contacts	1 C/O
Nominal Output Current	5 A
Hysteresis	3 % fixed of threshold setting
Measurement Accuracy	+/- 10 % of the full scale value
Polarity	Non reversible polarity on DC supply
Delay At Power Up	1000 ms DC 500 ms AC
Maximum Measuring Cycle	150 ms measurement cycle as true rms value
Repeat Accuracy	+/- 0.5 % for input and measurement circuit +/- 1 % for time delay

26 Apr 2024 Life Is On Schneider

Measurement Error	< 1 % over the whole range with voltage variation 0.2 %/°C with temperature variation
Quality Labels	CE
Insulation Resistance	> 500 MOhm at 500 V DC conforming to IEC 60255-5 > 500 MOhm at 500 V DC conforming to IEC 60664-1
Operating Position	Any position without derating
Local Signalling	LED (green) for power ON LED (yellow) for relay ON
Overvoltage Category	III conforming to IEC 60664-1
[Ui] Rated Insulation Voltage	250 V conforming to IEC 60664-1 400 V conforming to IEC 60664-1
Connections - Terminals	Screw terminals, 1 x 0.51 x 4 mm² (AWG 20AWG 11) solid without cable end Screw terminals, 2 x 0.52 x 2.5 mm² (AWG 20AWG 14) solid without cable end Screw terminals, 1 x 0.22 x 2.5 mm² (AWG 24AWG 12) flexible with cable end Screw terminals, 2 x 0.22 x 1.5 mm² (AWG 24AWG 16) flexible with cable end
Tightening Torque	0.61 N.m conforming to IEC 60947-1
Housing Material	Self-extinguishing plastic
Mounting Support	35 mm symmetrical DIN rail conforming to IEC 60715
Electrical Durability	100000 cycles
Mechanical Durability	30000000 cycles
Operating Rate	<= 360 operations/hour full load
Utilisation Category	AC-12 conforming to IEC 60947-5-1 AC-13 conforming to IEC 60947-5-1 AC-14 conforming to IEC 60947-5-1 AC-15 conforming to IEC 60947-5-1 DC-12 conforming to IEC 60947-5-1 DC-13 conforming to IEC 60947-5-1 DC-14 conforming to IEC 60947-5-1
[Un] Rated Nominal Voltage	, self-powered
Safety Reliability Data	B10d = 470000 MTTFd = 502.2 years
Control Type	Without test button
Width	17.5 mm
Net Weight	0.08 kg
Environment	
Electromagnetic Compatibility	Emission standard for industrial environments conforming to IEC 61000-6-4 Emission standard for residential, commercial and light-industrial environments conforming to IEC 61000-6-3 Immunity for industrial environments conforming to NF EN/IEC 61000-6-2
Ambient Air Temperature For Operation	-2050 °C
Vibration Resistance	0.35 mm (f= 557.6 Hz) conforming to IEC 60068-2-6 1 gn (f= 57.6150 Hz) conforming to IEC 60255-21-1
Shock Resistance	5 gn conforming to IEC 60068-2-27
Standards	IEC 60255-6
Product Certifications	UL GL GOST C-Tick CSA
Ambient Air Temperature For Storage	-4070 °C

Relative Humidity	95 % at 55 °C conforming to IEC 60068-2-30	
Ip Degree Of Protection	IP20 (terminals) conforming to IEC 60529 IP30 (casing) conforming to IEC 60529	
Pollution Degree	3 conforming to IEC 60664-1	
Directives	73/23/EEC - low voltage directive 89/336/EEC - electromagnetic compatibility	
Dielectric Test Voltage	2 kV, 1 min AC 50 Hz conforming to IEC 60255-5 2 kV, 1 min AC 50 Hz conforming to IEC 60664-1	
Non-Dissipating Shock Wave	4 kV conforming to IEC 60255-5 4 kV conforming to IEC 60664-1 4 kV conforming to IEC 61000-4-5	

# **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.800 cm
Package 1 Width	7.800 cm
Package 1 Length	9.700 cm
Package 1 Weight	81.000 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	48
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	4.408 kg

## **Contractual warranty**

Warranty 18 months

## Sustainability Screen Premium

**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

#### Well-being performance



Mercury Free



Rohs Exemption Information

Yes


#### **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

#### **Dimensions Drawings**

#### Single-Phase and DC Voltage Control Relays

#### **Dimensions and Mounting**

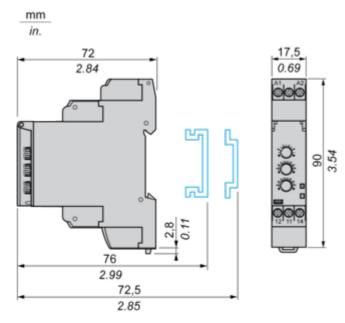


## **Product datasheet**

## **RM17UBE15**


Connections and Schema

#### Single-Phase and DC Voltage Control Relays

#### Wiring Diagram



#### **Application Scheme**

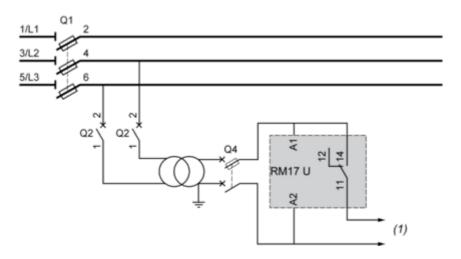


(1) To sensitive loads

#### **Technical Description**

#### **Function Diagram**

#### Control of Overvoltage and Undervoltage in Window Mode

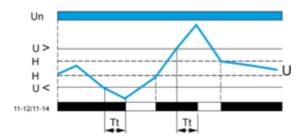

#### Legend

Tt Time delay after crossing of threshold

Un Nominal supply voltage

**U** Monitored supply voltage

**H** Hysteresis

**U>** Overvoltage threshold

U< Undervoltage threshold

11-12, 11-14 Output relay connections

Relay status: black color = energized.