Specifications





# Power plug-in relay, 15 A, 2 CO, 230 V AC

Local distributor code: 389835404

RPM21P7

EAN Code: 3389119401876

#### Main

| Range Of Product                                | Harmony Electromechanical Relays |  |
|---|----------------------------------|--|
| Series Name                                     | Power                            |  |
| Product Or Component Type                       | Plug-in relay                    |  |
| Device Short Name                               | RPM                              |  |
| Contacts Type And Composition                   | 2 C/O                            |  |
| [Uc] Control Circuit Voltage                    | 230 V AC 50/60 Hz                |  |
| [Ithe] Conventional Enclosed<br>Thermal Current | 15 A at -4055 °C                 |  |
| Status Led                                      | Without                          |  |
| Control Type                                    | Lockable test button             |  |
| Utilisation Coefficient                         | 20 %                             |  |

### Complementary

| Shape Of Pin                              | Flat  |
|---|---|
| [Ui] Rated Insulation Voltage             | 250 V conforming to IEC<br>300 V conforming to CSA<br>300 V conforming to UL  |
| [Uimp] Rated Impulse Withstand<br>Voltage | 4 kV during 1.2/50 μs   |
| Contacts Material                         | AgNi  |
| [le] Rated Operational Current            | 15 A at 277 V (AC) conforming to UL<br>15 A at 28 V (DC) conforming to UL<br>15 A at 250 V (AC) NO conforming to IEC<br>15 A at 28 V (DC) NO conforming to IEC<br>7.5 A at 250 V (AC) NC conforming to IEC<br>7.5 A at 28 V (DC) NC conforming to IEC |
| Maximum Switching Voltage                 | 250 V conforming to IEC   |
| Resistive Load Current                    | 15 A at 250 V AC<br>15 A at 28 V DC   |
| Maximum Switching Capacity                | 3750 VA<br>420 W  |
| Minimum Switching Capacity                | 170 mW at 10 mA, 17 V   |
| Operating Rate                            | <= 1200 cycles/hour under load<br><= 18000 cycles/hour no-load  |
| Mechanical Durability                     | 1000000 cycles  |
| Electrical Durability                     | 100000 cycles for resistive load  |
| Average Coil Consumption In Va            | 1.1 at 60 Hz  |
| Drop-Out Voltage Threshold                | >= 0.15 Uc AC   |

| Operate Time                     | 20 ms at nominal voltage    |  |
|----------------------------------|-----------------------------|--|
| Release Time                     | 20 ms at nominal voltage    |  |
| Average Coil Resistance          | 16270 Ohm at 20 °C +/- 15 % |  |
| Rated Operational Voltage Limits | 184253 V AC                 |  |
| Protection Category              | RTI                         |  |
| Test Levels                      | Level A group mounting      |  |
| Operating Position               | Any position                |  |
| Pollution Degree                 | 3                           |  |
| Safety Reliability Data          | B10d = 100000               |  |
| Net Weight                       | 0.036 kg                    |  |
| Device Presentation              | Complete product            |  |

### Environment

| Dielectric Strength                      | 1500 V AC between contacts with micro disconnection<br>2000 V AC between coil and contact with reinforced<br>2000 V AC between poles with basic |  |
|--|---|--|
| Standards                                | IEC 61810-1<br>UL 508<br>CSA C22.2 No 14  |  |
| Product Certifications                   | UL<br>EAC<br>CSA  |  |
| Ambient Air Temperature For<br>Storage   | -4085 °C  |  |
| Ambient Air Temperature For<br>Operation | -4055 °C  |  |
| Vibration Resistance                     | 3 gn, amplitude = +/- 1 mm (f = 10150 Hz)5 cycles in operation<br>5 gn, amplitude = +/- 1 mm (f = 10150 Hz)5 cycles not operating               |  |
| Degree Of Protection (Housing<br>Only)   | IP40 conforming to IEC 60529  |  |
| Shock Resistance                         | 15 gn for in operation<br>30 gn for not operating   |  |

### **Packing Units**

| Unit Type Of Package 1       | PCE       |
|------------------------------|-----------|
| Number Of Units In Package 1 | 1         |
| Package 1 Height             | 4.700 cm  |
| Package 1 Width              | 2.100 cm  |
| Package 1 Length             | 2.800 cm  |
| Package 1 Weight             | 36.000 g  |
| Unit Type Of Package 2       | BB1       |
| Number Of Units In Package 2 | 10        |
| Package 2 Height             | 3.200 cm  |
| Package 2 Width              | 10.300 cm |
| Package 2 Length             | 12.600 cm |
| Package 2 Weight             | 387.000 g |
| Unit Type Of Package 3       | S02       |
| Number Of Units In Package 3 | 240       |

| Package 3 Height | 15.000 cm |
|------------------|-----------|
| Package 3 Width  | 30.000 cm |
| Package 3 Length | 40.000 cm |
| Package 3 Weight | 9.758 kg  |

### **Contractual warranty**

Warranty

18 months

### Sustainability Screen

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

### Well-being performance

Reach Free Of Svhc


Rohs Exemption Information Yes

### **Certifications & Standards**


| Reach Regulation         | REACh Declaration   |
|--------------------------|---|
| Eu Rohs Directive        | Pro-active compliance (Product out of EU RoHS legal scope)<br>EU RoHS Declaration   |
| China Rohs Regulation    | China RoHS declaration  |
| Environmental Disclosure | Product Environmental Profile   |
| Weee                     | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Circularity Profile      | No need of specific recycling operations  |

#### **Dimensions Drawings**

#### Dimensions

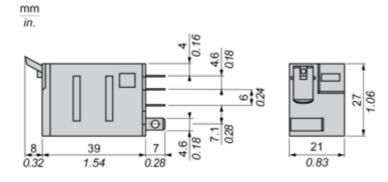


Pin Side View



#### Connections and Schema

#### Wiring Diagram

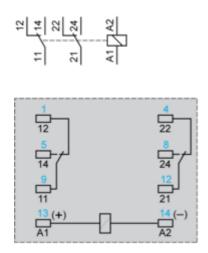


Symbols shown in blue correspond to Nema marking.

#### Performance Curves

#### **Electrical Durability of Contacts**


Durability (inductive load) = durability (resistive load) x reduction coefficient. Resistive AC load



#### X Switching capacity (kVA)


Y Durability (Number of operating cycles)

Reduction coefficient for inductive AC load (depending on power factor  $\cos \phi$ )



Y Reduction coefficient (A)

Maximum switching capacity on resistive DC load





Y Current DC

Note : These are typical curves, actual durability depends on load, environment, duty cycle, etc.