Specifications





(!) Discontinued

Interface plug-in relay, 10 A, 1 CO, clear cover, 24 V AC

RXG15B7

() Discontinued on: 1 Oct 2020

EAN Code: 3606480688881

Main

| Range Of Product | Harmony Relay |
|---|------------------|
| Series Name | Interface relay |
| Product Or Component Type | Plug-in relay |
| Device Short Name | RXG |
| Contacts Type And Composition | 1 C/O |
| [Ithe] Conventional Enclosed Thermal Current | 10 A at -4055 °C |

Complementary

| [le] Rated Operational Current | 10 A at 30 V (DC) conforming to UL 10 A at 30 V (DC) conforming to IEC 10 A at 250 V (AC) conforming to IEC 10 A at 250 V (AC) conforming to UL |
|--------------------------------|--|
| Electrical Durability | 100000 cycles for NO resistive load at 55 °C 100000 cycles for NC resistive load at 55 °C |
| Coil Resistance | 260 Ohm +/- 10 % |
| Shock Resistance | 20 gn in operation 100 gn not in operation |
| Mounting Position | Any position |
| Average Consumption In Va | 0.82 VA 60 Hz |
| Control Circuit Voltage Limits | 0.81.1 Uc AC |
| [Uc] Control Circuit Voltage | 24 V AC 50/60 Hz |
| Colour Of Cover | Transparent |
| Drop-Out Voltage Threshold | >= 0.3 Uc AC |
| Load Current | 10 A at 250 V AC |
| Minimum Switching Capacity | 500 mW at 100 mA, 5 V DC |
| Maximum Switching Capacity | 2500 VA |
| Torque Value | 0.8 N.m |
| Contact Resistance | 100 mOhm |
| Insulation Resistance | 1000 MOhm at 500 V DC |
| Electrical Insulation Class | Class F |
| Mechanical Durability | 1000000 cycles |
| Safety Reliability Data | B10d = 100000 |

| Operating Time | 20 ms |
|-------------------------------|--|
| Reset Time | 20 ms |
| Overvoltage Category | III |
| Maximum Switching Voltage | 250 V AC 30 V DC |
| Protection Category | RT I |
| Operating Rate | <= 1800 cycles/hour under load <= 18000 cycles/hour no-load |
| Pollution Degree | 2 |
| Utilisation Coefficient | 20 % |
| [Ui] Rated Insulation Voltage | 250 V conforming to IEC 300 V conforming to CSA 300 V conforming to UL |
| Dielectric Strength | 1000 V AC between contacts with micro disconnection 5000 V AC between coil and contact with reinforced insulation |
| Test Levels | Level A group mounting |
| Device Presentation | Complete product |
| Contacts Material | Silver alloy (AgSnO2In2O3) |
| Net Weight | 0.019 kg |

Environment

| Standards | UL 508 IEC 61810-1 CSA C22.2 No 14 |
|--|--|
| Product Certifications | UL EAC CSA CE DNV-GL |
| Ambient Air Temperature For Storage | -4085 °C |
| Ambient Air Temperature For Operation | -4070 °C |
| Ip Degree Of Protection | IP40 |
| Relative Humidity | 1085 % |
| Vibration Resistance | 3 gn, amplitude = +/- 0.75 mm (f = 10150 Hz)in operation 5 gn, amplitude = +/- 0.75 mm (f = 10150 Hz)not in operation |

Packing Units

| Unit Type Of Package 1 | PCE |
|------------------------------|-----|
| Number Of Units In Package 1 | 1 |

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance


Reach Free Of Svhc
Toxic Heavy Metal Free
Mercury Free
Rohs Exemption Information Yes

Certifications & Standards

| Reach Regulation | REACh Declaration |
|--------------------------|---|
| Eu Rohs Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| China Rohs Regulation | China RoHS declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | No need of specific recycling operations |


Dimensions Drawings

Dimensions

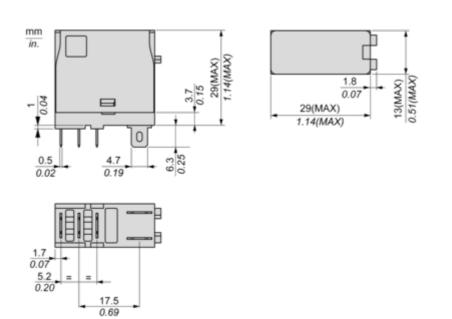

Connections and Schema


Wiring Diagram



Performance Curves

Performance Curves

Maximum Switching Capacity




X : Switching voltage (V)

- Y: Switching current (A)
- (1) AC Resistive Load
- (2) AC Inductive Load cos(Ø)=0.4
- (3) DC Resistive Load
- (4) DC Inductive Load (L/R=7ms)

Life Expectancy

Resistive Load




X : Contact Current (A)

Y: Operating Cycle Number

Life Expectancy

Inductive Load




X : Contact Current (A)

Y: Operating Cycle Number

NOTE: These are typical curves, actual durability depends on load, environment, duty cycle, etc.

Coil Operating Range

AC Coil Operating Range VS Ambient Temperature

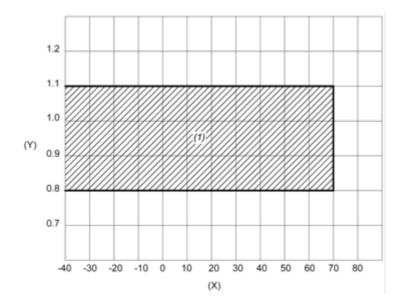

X : Ambient temperature (°C)

Y: Coil voltage (U/Uc)

(1) Permitted operating range area