Product datasheet

Specification





Interface plug-in relay, 5 A, 2 CO, lockable test button, 24 V AC

Local distributor code:

403006151 RXG21B7

EAN Code: 3606480688997

Main

| Range Of Product | Harmony Electromechanical Relays | |
|---|----------------------------------|--|
| Series Name | Interface relay | |
| Product Or Component Type | Plug-in relay | |
| Device Short Name | RXG | |
| Contacts Type And Composition | 2 C/O | |
| [Ithe] Conventional Enclosed Thermal Current | 5 A at -4055 °C | |
| Local Signalling | Flag | |

Complementary

| Status Led | Without | |
|--------------------------------|---|--|
| [le] Rated Operational Current | 5 A at 30 V (DC) conforming to UL 5 A at 30 V (DC) conforming to IEC 5 A at 250 V (AC) conforming to IEC 5 A at 250 V (AC) conforming to UL | |
| Electrical Durability | 100000 cycles for NO resistive load at 55 °C 100000 cycles for NC resistive load at 55 °C | |
| Coil Resistance | 260 Ohm +/- 10 % | |
| Shock Resistance | 20 gn in operation 100 gn not in operation | |
| Mounting Position | Any position | |
| Average Consumption In Va | 0.82 VA 60 Hz | |
| Control Circuit Voltage Limits | 0.81.1 Uc AC | |
| [Uc] Control Circuit Voltage | 24 V AC 50/60 Hz | |
| Colour Of Cover | Standard | |
| Drop-Out Voltage Threshold | >= 0.3 Uc AC | |
| Load Current | 5 A at 250 V AC | |
| Minimum Switching Capacity | 50 mW at 10 mA, 5 V DC | |
| Maximum Switching Capacity | 1250 VA | |
| Control Type | Lockable test button | |
| Torque Value | 0.8 N.m | |
| Contact Resistance | 100 mOhm | |
| Insulation Resistance | 1000 MOhm at 500 V DC | |
| Electrical Insulation Class | Class F | |

| Mechanical Durability | 10000000 cycles | |
|-------------------------------|---|--|
| Safety Reliability Data | B10d = 100000 | |
| Operating Time | 20 ms | |
| Reset Time | 20 ms | |
| Overvoltage Category | III | |
| Maximum Switching Voltage | 250 V AC 30 V DC | |
| Protection Category | RTI | |
| Operating Rate | <= 1800 cycles/hour under load <= 18000 cycles/hour no-load | |
| Pollution Degree | 2 | |
| Utilisation Coefficient | 20 % | |
| [Ui] Rated Insulation Voltage | 250 V conforming to IEC 300 V conforming to CSA 300 V conforming to UL | |
| Dielectric Strength | 1000 V AC between contacts with micro disconnection 5000 V AC between coil and contact with reinforced insulation 3000 V AC between poles with basic insulation | |
| Test Levels | Level A group mounting | |
| Device Presentation | Complete product | |
| Contacts Material | Silver alloy (AgSnO2ln2O3) | |
| Net Weight | 0.02 kg | |
| | | |

Environment

| Standards | UL 508 IEC 61810-1 CSA C22.2 No 14 | |
|---------------------------------------|--|--|
| Product Certifications | CSA UL EAC CE DNV-GL | |
| Ambient Air Temperature For Storage | -4085 °C | |
| Ambient Air Temperature For Operation | -4070 °C | |
| Ip Degree Of Protection | IP40 | |
| Relative Humidity | 1085 % | |
| Vibration Resistance | 3 gn, amplitude = +/- 0.75 mm (f = 10150 Hz)in operation 5 gn, amplitude = +/- 0.75 mm (f = 10150 Hz)not in operation | |

Packing Units

| Unit Type Of Package 1 | PCE |
|------------------------------|----------|
| Number Of Units In Package 1 | 1 |
| Package 1 Height | 1.016 cm |
| Package 1 Width | 3.302 cm |
| Package 1 Length | 4.318 cm |
| Package 1 Weight | 18.144 g |
| Unit Type Of Package 2 | BB1 |

| Number Of Units In Package 2 | 10 |
|------------------------------|---------|
| Package 2 Height | 3.5 cm |
| Package 2 Width | 8.3 cm |
| Package 2 Length | 9.1 cm |
| Package 2 Weight | 221 g |
| Unit Type Of Package 3 | S01 |
| Number Of Units In Package 3 | 200 |
| Package 3 Height | 15 cm |
| Package 3 Width | 15 cm |
| Package 3 Length | 40 cm |
| Package 3 Weight | 4.79 kg |

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance


| ⊘ | Reach Free Of Svhc | |
|----------|----------------------------|-----|
| Ø | Toxic Heavy Metal Free | |
| ⊘ | Mercury Free | |
| ⊘ | Rohs Exemption Information | Yes |

Certifications & Standards

| Reach Regulation | REACh Declaration |
|--------------------------|--|
| Eu Rohs Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| China Rohs Regulation | China RoHS declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | No need of specific recycling operations |

Dimensions Drawings

Dimensions

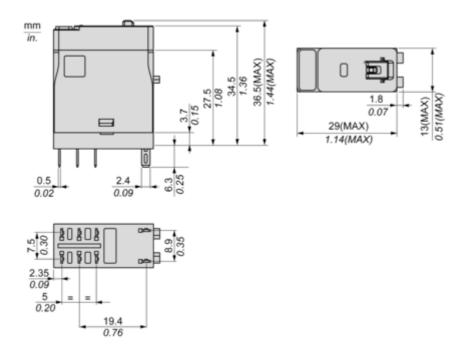


Product datasheet

RXG21B7

Connections and Schema


Wiring Diagram



Performance Curves

Performance Curves

Maximum Switching Capacity



X : Switching voltage (V)

Y: Switching current (A)

(1) AC Resistive Load


(2) AC Inductive Load cos(Ø)=0.4

(3) DC Resistive Load

(4) DC Inductive Load (L/R=7ms)

Life Expectancy

Resistive Load




X: Contact Current (A)

Y: Operating Cycle Number

Life Expectancy

Inductive Load



X: Contact Current (A)

Y: Operating Cycle Number


Product datasheet

RXG21B7

NOTE: These are typical curves, actual durability depends on load, environment, duty cycle, etc.

Coil Operating Range

AC Coil Operating Range VS Ambient Temperature

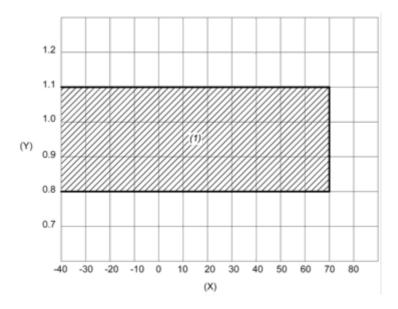

- X : Ambient temperature (°C)
- Y: Coil voltage (U/Uc)
- (1) Permitted operating range area