Specifications





(!) Discontinued

# Interface plug-in relay, 5 A, 2 CO, lockable test button, 48 V DC

RXG21ED

() Discontinued on: 1 Jul 2020

EAN Code: 3606480689079

#### Main

Range Of Product	Harmony Relay
Series Name	Interface relay
Product Or Component Type	Plug-in relay
Device Short Name	RXG
Contacts Type And Composition	2 C/O
[Ithe] Conventional Enclosed Thermal Current	5 A at -4055 °C
Local Signalling	Flag

## Complementary

e emprementar y	
Status Led	Without
[le] Rated Operational Current	5 A at 30 V (DC) conforming to UL 5 A at 30 V (DC) conforming to IEC 5 A at 250 V (AC) conforming to IEC 5 A at 250 V (AC) conforming to UL
Electrical Durability	100000 cycles for NO resistive load at 55 °C 100000 cycles for NC resistive load at 55 °C
Coil Resistance	4400 Ohm +/- 10 %
Shock Resistance	20 gn in operation 100 gn not in operation
Mounting Position	Any position
[Uc] Control Circuit Voltage	48 V DC
Colour Of Cover	Standard
Drop-Out Voltage Threshold	>= 0.1 Uc DC
Load Current	5 A at 250 V AC
Minimum Switching Capacity	50 mW at 10 mA, 5 V DC
Maximum Switching Capacity	1250 VA
Control Type	Lockable test button
Torque Value	0.8 N.m
Contact Resistance	100 mOhm
Insulation Resistance	1000 MOhm at 500 V DC
Electrical Insulation Class	Class F
Mechanical Durability	1000000 cycles

Safety Reliability Data	B10d = 100000
Operating Time	20 ms
Reset Time	20 ms
Overvoltage Category	111
Maximum Switching Voltage	250 V AC 30 V DC
Protection Category	RTI
Operating Rate	<= 1800 cycles/hour under load <= 18000 cycles/hour no-load
Pollution Degree	2
Utilisation Coefficient	20 %
[Ui] Rated Insulation Voltage	250 V conforming to IEC 300 V conforming to CSA 300 V conforming to UL
Dielectric Strength	1000 V AC between contacts with micro disconnection 5000 V AC between coil and contact with reinforced insulation 3000 V AC between poles with basic insulation
Test Levels	Level A group mounting
Device Presentation	Complete product
Contacts Material	Silver alloy (AgSnO2In2O3)
Net Weight	0.02 kg

## Environment

Standards	CSA C22.2 No 14 IEC 61810-1 UL 508
Product Certifications	EAC UL CSA CE
Ambient Air Temperature For Storage	-4085 °C
Ambient Air Temperature For Operation	-4070 °C
Ip Degree Of Protection	IP40
Relative Humidity	1085 %
Vibration Resistance	3 gn, amplitude = +/- 0.75 mm (f = 10150 Hz)in operation 5 gn, amplitude = +/- 0.75 mm (f = 10150 Hz)not in operation

## **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1

## **Contractual warranty**

Warranty

18 months

## Sustainability Screen Premium

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

## Well-being performance


Reach Free Of Svhc
Toxic Heavy Metal Free
Mercury Free
Rohs Exemption Information Yes

### **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations


**Dimensions Drawings** 

#### Dimensions

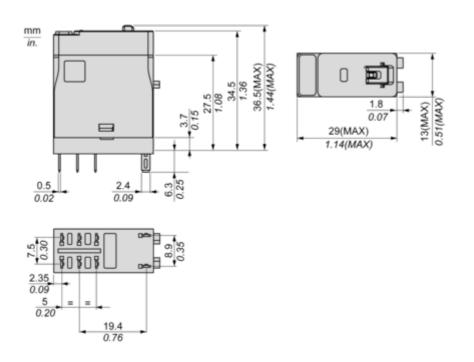

Connections and Schema


#### Wiring Diagram



#### Performance Curves

#### **Performance Curves**

#### **Maximum Switching Capacity**




X : Switching voltage (V)

- Y : Switching current (A)
- (1) AC Resistive Load
- (2) AC Inductive Load  $\cos(\emptyset)=0.4$
- (3) DC Resistive Load
- (4) DC Inductive Load (L/R=7ms)

#### Life Expectancy

Resistive Load




X : Contact Current (A)

#### Y : Operating Cycle Number

#### Life Expectancy

Inductive Load




X : Contact Current (A)

Y: Operating Cycle Number

**NOTE:** These are typical curves, actual durability depends on load, environment, duty cycle, etc.

#### Coil Operating Range

#### DC Coil Operating Range VS Ambient Temperature

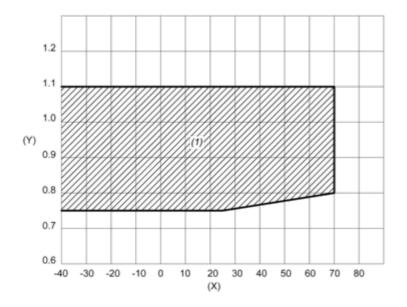

X : Ambient temperature (°C)

Y: Coil voltage (U/Uc)

(1) Permitted operating range area