Product datasheet

Specification





Socket, separate contact, 12 A, relay type RXM2, screw connector, 250 V AC

Local distributor code: 389838074

RXZE2S108M

EAN Code: 3389119404266

Main

| Range Of Product | Harmony Electromechanical Relays Harmony Timer Relays |
|------------------------------------------------|----------------------------------------------------------------------------|
| Device Short Name | RXZ |
| Product Or Component Type | Socket |
| Product Compatibility | Plug-in relay RXM with 2 C/O contact Plug-in relay REXL with 2 C/O contact |
| Contacts Type And Composition | 2 C/O |
| [Ith] Conventional Free Air Thermal Current | 12 A |

Complementary

| Shape Of Pin | Flat | |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| [Ue] Rated Operational Voltage | < 250 V | |
| Contact Terminal Arrangement | Separate | |
| Connections - Terminals | Connector, 2 x 0.52 x 1.5 mm² (AWG 20AWG 16) solid without cable end Connector, 1 x 0.251 x 2.5 mm² (AWG 22AWG 17) flexible with cable end Connector, 1 x 0.51 x 2.5 mm² (AWG 22AWG 14) flexible with cable end Connector, 2 x 0.252 x 1 mm² (AWG 20AWG 14) solid without cable end | |
| Tightening Torque | ening Torque < 1 N.m for M3 screw(s) | |
| Fixing Mode | By screw (panel) Clip-on (35 mm symmetrical DIN rail) | |
| [Uimp] Rated Impulse Withstand Voltage | 4 kV | |
| Overvoltage Category III | | |
| Pollution Degree | 3 | |
| Sale Per Indivisible Quantity | 10 | |
| Width | 27 mm | |
| Net Weight | 0.058 kg | |

Environment

| Ip Degree Of Protection | IP20 conforming to IEC 60529 | |
|-------------------------|------------------------------|--|
| Dielectric Strength | 2500 V | |
| Standards | IEC 61984 | |
| Product Certifications | CSA Lloyd's UL | |
| Marking | CE | |

| Ambient Air Temperature For Storage | -4085 °C |
|---------------------------------------|----------|
| Ambient Air Temperature For Operation | -4055 °C |

Packing Units

| Unit Type Of Package 1 | PCE |
|------------------------------|-----------|
| Number Of Units In Package 1 | 1 |
| Package 1 Height | 2.746 cm |
| Package 1 Width | 6.112 cm |
| Package 1 Length | 8.207 cm |
| Package 1 Weight | 50 g |
| Unit Type Of Package 2 | BB1 |
| Number Of Units In Package 2 | 10 |
| Package 2 Height | 6.6 cm |
| Package 2 Width | 11 cm |
| Package 2 Length | 13.9 cm |
| Package 2 Weight | 580 g |
| Unit Type Of Package 3 | S03 |
| Number Of Units In Package 3 | 200 |
| Package 3 Height | 30 cm |
| Package 3 Width | 30 cm |
| Package 3 Length | 40 cm |
| Package 3 Weight | 11.173 kg |

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance


| Ø | Reach Free Of Svhc | |
|----------|----------------------------|-----|
| Ø | Toxic Heavy Metal Free | |
| ② | Mercury Free | |
| ⊘ | Rohs Exemption Information | Yes |

Certifications & Standards

| Reach Regulation | REACh Declaration |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Eu Rohs Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| China Rohs Regulation | China RoHS declaration |
| Environmental Disclosure | Product Environmental Profile |
| Weee | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Circularity Profile | No need of specific recycling operations |

Dimensions Drawings

Dimensions

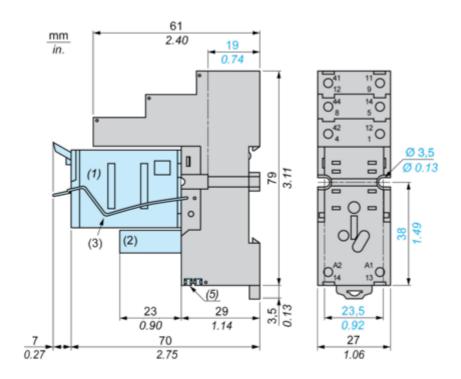

- (1) Relays
- (2) Protection module
- (3) Maintaining clamp
- (4) 2 elongated holes Ø 3.5 mm x 6.5 mm / Ø 0.13 in. x 0.25 in.
- (5) 2 bus jumpers

Connections and Schema

Wiring Diagram

