Specifications





profibus DP slave link - PCI communication module

TM5PCDPS

EAN Code: 3595864074412

Main

Range Of Product	Modicon TM5	
Product Or Component Type	Profibus DP communication module	
Physical Interface	RS485	

Complementary

Range Compatibility	Modicon M258 Modicon LMC058			
Product Compatibility	Motion controller Logic controller			
Method Of Access	Slave V1			
Integrated Connection Type	ted Connection Type 1 isolated serial link, female SUB-D 9 Profibus DP (RS485), <= 12 Mbit/s			
Marking	CE			
Net Weight	Veight 0.05 kg			

Environment

Standards	CSA C22.2 No 213 UL 508 CSA C22.2 No 142 IEC 61131-2			
Product Certifications	CSA cULus GOST-R C-Tick			
Ambient Air Temperature For Operation	055 °C without derating (horizontal installation) 060 °C with derating factor (horizontal installation) 050 °C (vertical installation)			
Ambient Air Temperature For Storage	-2570 °C			
Relative Humidity	595 % without condensation			
Ip Degree Of Protection	IP20 conforming to IEC 61131-2			
Pollution Degree	2 conforming to IEC 60664			
Operating Altitude	02000 m			
Storage Altitude	03000 m			
Vibration Resistance	1 gn at 8.4150 Hz on DIN rail 3.5 mm at 58.4 Hz on DIN rail			
Shock Resistance	15 gn for 11 ms			
Resistance To Electrostatic Discharge	4 kV on contact conforming to IEC 61000-4-2 8 kV in air conforming to IEC 61000-4-2			

Resistance To Electromagnetic Fields	1 V/m 22.7 GHz conforming to IEC 61000-4-3 10 V/m 80 MHz2 GHz conforming to IEC 61000-4-3		
Resistance To Fast Transients	1 kV (I/O) conforming to IEC 61000-4-4		
	1 kV (shielded cable) conforming to IEC 61000-4-4		
	2 kV (power lines) conforming to IEC 61000-4-4		
Surge Withstand	0.5 kV differential mode conforming to IEC 61000-4-5		
	1 kV common mode conforming to IEC 61000-4-5		
Electromagnetic Compatibility	EN/IEC 61000-4-6		
Disturbance Radiated/Conducted	iated/Conducted CISPR 11		

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.000 cm
Package 1 Width	6.000 cm
Package 1 Length	10.500 cm
Package 1 Weight	64.000 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	48
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	3.120 kg

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Reach Free Of Svhc
Toxic Heavy Metal Free
Mercury Free
Rohs Exemption Information Yes
Pvc Free


Certifications & Standards


Reach Regulation	REACh Declaration		
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration		
China Rohs Regulation	China RoHS declaration		
Environmental Disclosure	Product Environmental Profile		
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins		
Circularity Profile	End of Life Information		

Dimensions Drawings

TM5 Field Bus Interface

Dimensions

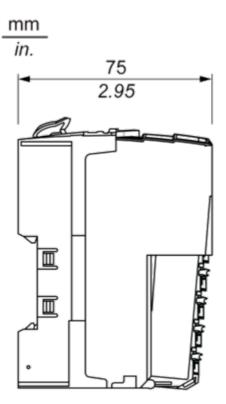


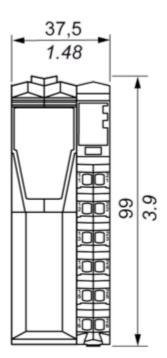


Mounting and Clearance

TM5 System

Spacing Requirements

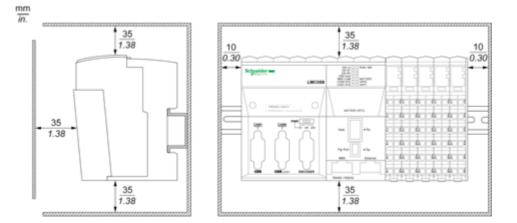

Mounting on a DIN Rail

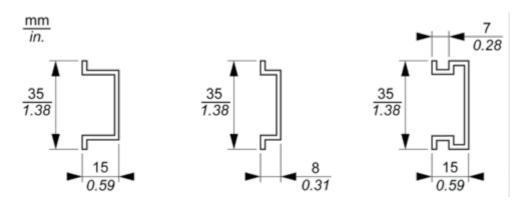

Connections and Schema

TM5 System Wiring Recommendations

Wire Sizes to Use with the Removable Spring Terminal Blocks

mm in.	9 0.35				
	mm ²	0,082,5	0,252,5	0,251,5	2 x 0,252 x 0,75
	AWG	2814	2414	2416	2 x 242 x 18