

Product datasheet

Specifications



Safety digital output module - 2O - 24V DC - 2A

TM5SDO2TAFS

! Discontinued on: 9 Feb 2023

EAN Code: 3595864128160

! Discontinued

Main

Range Of Product	Modicon TM5
Product Or Component Type	Safety dc discrete output module
Discrete Output Number	2
Discrete Output Type	Solid state

Complementary

Range Compatibility	PacDrive LMC motion controller
Product Compatibility	PacDrive LMC Pro 2 PacDrive LMC Pro PacDrive LMC Eco
Output Voltage	24 V DC
Output Voltage Limits	20.4...28.8 V
Discrete Output Logic	Source
Current Per Channel	2 A
Maximum Current Per Output Common	4 A
Colour	Red
Peak Output Current	12 A
Switching Frequency	<= 500 Hz resistive load
Maximum Leakage Current	10 µA when switched off
Protection Type	Overload protection Short-circuit protection
Isolation	500 Vrms AC insulation between channel and bus No insulation between channels
Maximum Power Consumption In W	0.25 W for bus 0.98 W for internal
Local Signalling	1 LED green for power supply 1 LED red for power supply 2 LEDs red for safety status 2 LEDs red/orange for output status
Electrical Connection	2 wires
Marking	CE
Safety Level	SIL 3 conforming to IEC 61508 SIL 3 conforming to IEC 62061 PL = e conforming to EN 13849-1

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Safety Reliability Data	MTTFd > 100 years PFD < 1E-5 PFH < 1E-9
Net Weight	0.025 kg

Environment

Standards	IEC 61131-2 IEC 62061 UL 508 CSA C22.2 No 142 IEC 61508 EN 13849-1
Product Certifications	CSA GOST-R cULus
Ambient Air Temperature For Operation	-10...50 °C (vertical installation) -10...55 °C (horizontal installation)
Ambient Air Temperature For Storage	-40...70 °C
Relative Humidity	5...95 % without condensation
Ip Degree Of Protection	IP20 conforming to EN 60529
Pollution Degree	2 conforming to IEC 60664
Operating Altitude	0...2000 m
Storage Altitude	0...3000 m
Vibration Resistance	1 gn at 8.4...150 Hz on DIN rail 3.5 mm at 5...8.4 Hz
Shock Resistance	15 gn for 11 ms
Electromagnetic Compatibility	Electrostatic discharge immunity test, 4 kV on contact conforming to EN/IEC 61000-4-2 Electrostatic discharge immunity test, 8 kV in air conforming to EN/IEC 61000-4-2 Susceptibility to electromagnetic fields, 10 V/m 80...2000 MHz conforming to EN/IEC 61000-4-3 Electrical fast transient/burst immunity test, 1 kV I/O conforming to EN/IEC 61000-4-4 Electrical fast transient/burst immunity test, 1 kV shielded cable conforming to EN/IEC 61000-4-4 Electrical fast transient/burst immunity test, 2 kV power lines conforming to EN/IEC 61000-4-4 1.2/50 µs shock waves immunity test, 0.5 kV differential mode conforming to EN/IEC 61000-4-5 1.2/50 µs shock waves immunity test, 1 kV common mode conforming to EN/IEC 61000-4-5 Conducted RF disturbances conforming to EN/IEC 61000-4-6 Conducted and radiated emissions conforming to CISPR 11

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.000 cm
Package 1 Width	6.000 cm
Package 1 Length	10.500 cm
Package 1 Weight	69.000 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	50
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm

Package 2 Length	40.000 cm
Package 2 Weight	3.450 kg

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency RoHS/REACH

Well-being performance

✓	Reach Free Of Svhc	
✓	Toxic Heavy Metal Free	
✓	Mercury Free	
✓	Rohs Exemption Information	Yes
✓	Pvc Free	


Certifications & Standards

Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

Dimensions Drawings

TM5 Slice


Dimensions

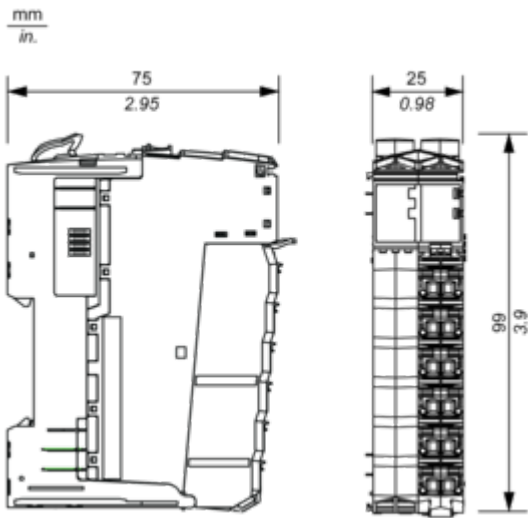


Mounting and Clearance

TM5 Safety System

Spacing Requirements

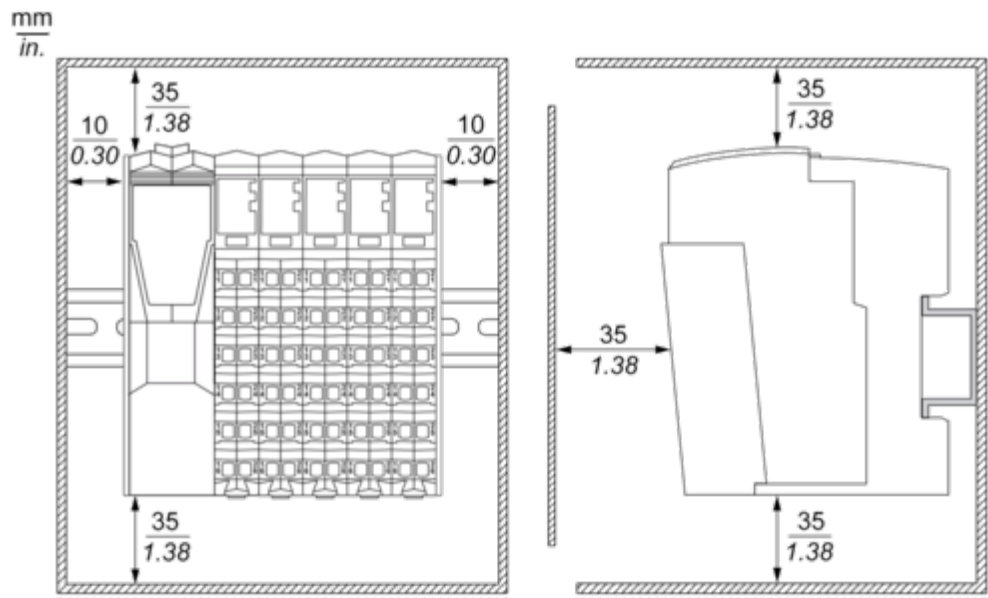

Mounting on a DIN Rail

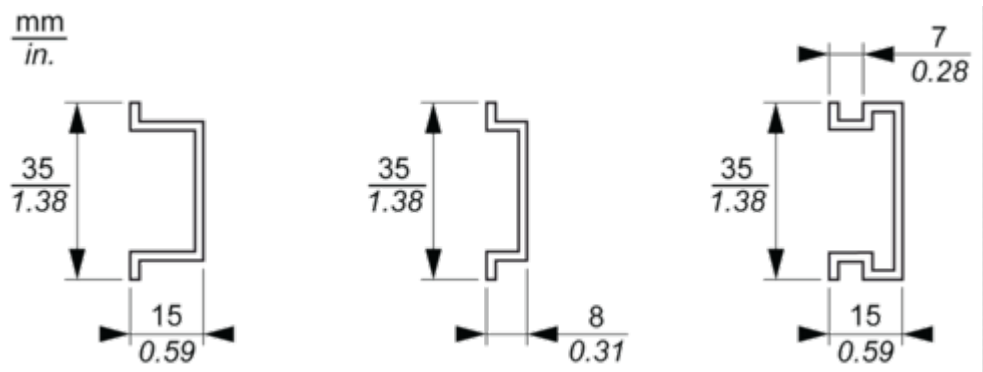

Connections and Schema


TM5 System Wiring Recommendations

Wire Sizes to Use with the Removable Spring Terminal Blocks

mm in. 9 0.35				
mm ²	0,08...2,5	0,25...2,5	0,25...1,5	2 x 0,25...2 x 0,75
AWG	28...14	24...14	24...16	2 x 24...2 x 18

Electronic Module 2DO 24 Vdc Tr 2 A 2 Wires

Wiring Diagram

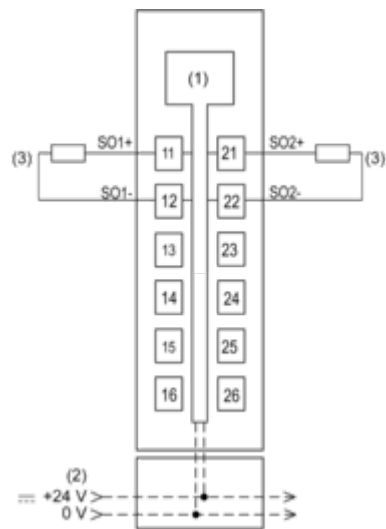

- (1) Internal electronics
- (2) 24 Vdc I/O power segment integrated into the bus bases
- (3) Actuator 24 Vdc, max. 2.0A, residual current 4.0A