# **Product datasheet**





## common distribution module - 12 x 24 V DC

TM5SPDD12F

! Discontinued on: 9 Feb 2023

EAN Code: 3595864074962

#### Main

Range Of Product	Modicon TM5	
Product Or Component Type	Common distribution module	
Product Specific Application	Cabling various voltage to power 12 I/O in 24 V DC	

### Complementary

Range Compatibility	Modicon LMC058 Modicon M258	
Product Compatibility	Motion controller Logic controller	
[Us] Rated Supply Voltage	24 V	
Network Type	DC	
Short-Circuit Protection	6.3 A internal fuse	
Marking	CE	
Net Weight	0.025 ka	

#### **Environment**

Standards	UL 508 CSA C22.2 No 213 IEC 61131-2 CSA C22.2 No 142		
Product Certifications	C-Tick GOST-R cULus CSA		
Ambient Air Temperature For Operation	050 °C (vertical installation) 055 °C without derating (horizontal installation) 060 °C with derating factor (horizontal installation)		
Ambient Air Temperature For Storage	-2570 °C		
Relative Humidity	595 % without condensation		
Ip Degree Of Protection	rotection IP20 conforming to IEC 61131-2		
Pollution Degree	2 conforming to IEC 60664		
Operating Altitude	<b>de</b> 02000 m		
Storage Altitude	titude 03000 m		
Vibration Resistance	1 gn at 8.4150 Hz on DIN rail 3.5 mm at 58.4 Hz on DIN rail		
Shock Resistance	15 gn for 11 ms		

Life Is On Schneider 3 May 2024

Resistance To Electrostatic Discharge	4 kV on contact conforming to IEC 61000-4-2 8 kV in air conforming to IEC 61000-4-2		
Resistance To Electromagnetic Fields	1 V/m 22.7 GHz conforming to IEC 61000-4-3 10 V/m 802000 MHz conforming to IEC 61000-4-3		
Resistance To Fast Transients	1 kV (I/O) conforming to IEC 61000-4-4 1 kV (shielded cable) conforming to IEC 61000-4-4 2 kV (power lines) conforming to IEC 61000-4-4		
Surge Withstand	0.5 kV differential mode conforming to IEC 61000-4-5 1 kV common mode conforming to IEC 61000-4-5		
Electromagnetic Compatibility	EN/IEC 61000-4-6		
isturbance Radiated/Conducted CISPR 11			

# **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.000 cm
Package 1 Width	6.000 cm
Package 1 Length	10.500 cm
Package 1 Weight	39.000 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	97
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	4.130 kg

## **Contractual warranty**

Warranty 18 months



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

### Well-being performance

<b>⊘</b>	Toxic Heavy Metal Free	
<b>⊘</b>	Mercury Free	
<b>Ø</b>	Rohs Exemption Information	Yes
<b>⊘</b>	Pvc Free	

#### **Certifications & Standards**


Reach Regulation	REACh Declaration		
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)		
China Rohs Regulation	China RoHS declaration		
Environmental Disclosure	Product Environmental Profile		
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins		
Circularity Profile	End of Life Information		

### TM5SPDD12F

**Dimensions Drawings** 

### TM5 Slice


#### **Dimensions**

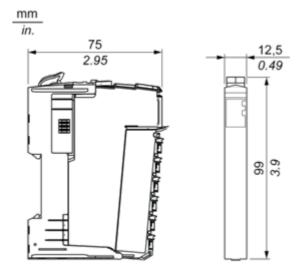


Mounting and Clearance


### TM5 System


#### **Spacing Requirements**




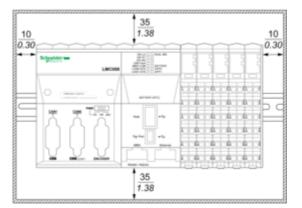

#### Mounting on a DIN Rail







### **Product datasheet**

### TM5SPDD12F

Connections and Schema


#### TM5 System Wiring Recommendations

Wire Sizes to Use with the Removable Spring Terminal Blocks

mm in.	0.35		Ω		
	mm²	0,082,5	0,252,5	0,251,5	2 x 0,252 x 0,75
	AWG	2814	2414	2416	2 x 242 x 18


#### Electronic Module 12 x 24 Vdc

#### Wiring Diagrams

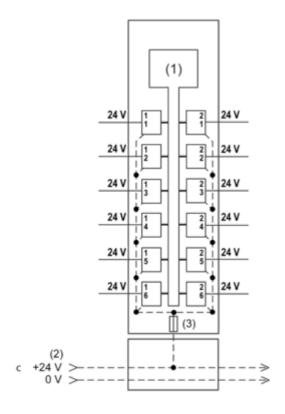

- (1) Internal electronics
- (2) 24 Vdc I/O power segment integrated into the bus bases
- (3) Integrated fuse type T slow-blow 6.3 A 250 V exchangeable

The following figure shows the wiring diagram with a TM5SDI12D:

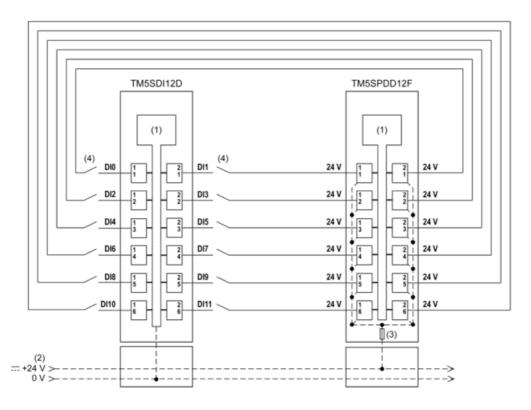

(1) Internal electronics

### **Product datasheet**

### TM5SPDD12F

- (2) 24 Vdc I/O power segment integrated into the bus bases (3) Integrated fuse type T slow-blow 6.3 A 250 V exchangeable
- (4) 1-wire sensor