

## Specifications



Local distributor code:

380656747

XVBL6G5

ⓘ Discontinued on: 9 Feb 2023

EAN Code: 3389110844801

ⓘ Discontinued

|                                    |  |
|------------------------------------|--|
| Range Of Product                   | Harmony XVB Universal  |
| Product Or Component Type          | Complete beacon  |
| Beacon Or Indicator Bank Unit Type | Base unit direct or tube fixing<br>Illuminated unit                      |
| Signalling Type                    | Flashing   |
| Mounting Diameter                  | 70 mm  |
| Component Name                     | XVBL   |
| Material                           | Glass reinforced polyamide: base unit<br>Polycarbonate: illuminated unit |
| Light Source                       | Integral flash discharge tube, orange                                    |
| Bulb Type                          | Flash discharge tube   |
| [Us] Rated Supply Voltage          | 120 V AC   |

|  |  |
|--|--|
| Connections - Terminals                | Screw clamp terminals, <= 1 x 1.5 mm² with cable end |
| [UI] Rated Insulation Voltage          | 250 V conforming to IEC 60947-1                      |
| Nominal Voltage Limit                  | 0.85...1.1 Un conforming to IEC 60947-5-1            |
| Current Consumption                    | < 140 mA AC  |
| [Uimp] Rated Impulse Withstand Voltage | 4 kV conforming to IEC 60947-1                       |
| Flash Energy                           | 5 J  |
| Flashing Frequency                     | 1 Hz   |
| Cad Overall Width                      | 70 mm  |
| Cad Overall Height                     | 232 mm   |
| Cad Overall Depth                      | 70 mm  |
| Terminals Description Iso N°1          | (COM-1)PW<br>(GND)GROUND                             |
| Net Weight                             | 0.425 kg   |

|                        |                 |
|------------------------|-----------------|
| Product Certifications | CCC             |
|                        | EAC             |
|                        | CSA C22-2 No 14 |
|                        | UL 508          |

|                                     |  |
|-------------------------------------|--|
| Standards                           | IEC 60947-5-1  |
| Protective Treatment                | TC   |
| Ambient Air Temperature For Storage | -40...70 °C  |
| Electrical Shock Protection Class   | Class I on support tube conforming to IEC 61140<br>Class II on base unit conforming to IEC 61140 |
| Ip Degree Of Protection             | IP65 on fixing base XVBZ0. conforming to IEC 60529<br>IP66 on base unit conforming to IEC 60529  |
| Nema Degree Of Protection           | Type 4X conforming to UL (indoor)  |

## Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type Of Package 1       | PCE      |
| Number Of Units In Package 1 | 1        |
| Package 1 Height             | 8.0 cm   |
| Package 1 Width              | 8.0 cm   |
| Package 1 Length             | 25.2 cm  |
| Package 1 Weight             | 417.0 g  |
| Unit Type Of Package 2       | S03      |
| Number Of Units In Package 2 | 12       |
| Package 2 Height             | 30.0 cm  |
| Package 2 Width              | 30.0 cm  |
| Package 2 Length             | 40.0 cm  |
| Package 2 Weight             | 5.476 kg |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Sustainability



**Green Premium™ label** is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.



[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency   RoHS/REACH

Well-being performance

|  |     |
|--|-----|
|  Mercury Free               |     |
|  RoHS Exemption Information | Yes |


Certifications & Standards

|                          |   |
|--------------------------|---|
| Reach Regulation         | <a href="#">REACH Declaration</a>   |
| Eu Rohs Directive        | Pro-active compliance (Product out of EU RoHS legal scope)  |
| China Rohs Regulation    | <a href="#">China RoHS declaration</a>  |
| Environmental Disclosure | <a href="#">Product Environmental Profile</a>   |
| Weee                     | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Circularity Profile      | No need of specific recycling operations  |

Dimensions Drawings

Illuminated Beacon with “Flash” Discharge Tube Unit

Dimensions

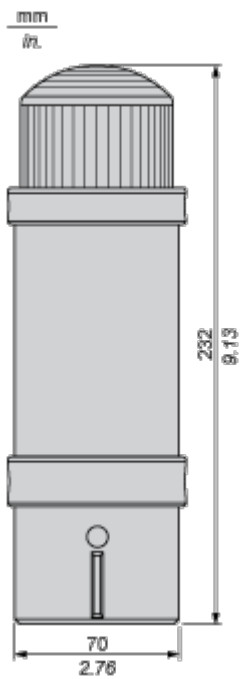

## Connections and Schema

## Illuminated Beacon

## Wiring Diagram

