

## Specifications



Local distributor code:

393393149

BMXDAO1605H

EAN Code: 3595864027821

Range Of Product	Modicon X80
Product Or Component Type	Discrete output module
Product Specific Application	For severe environments
Discrete Output Number	16
Discrete Output Type	Triac
Discrete Output Voltage	100...240 V AC
Discrete Output Current	0.6 A

Current Per Channel	0.24 A at 70 °C 0.6 A at 60 °C
Maximum Current Per Output Common	0.96 A at 70 °C 2.4 A at 60 °C
Maximum Current Per Module	1.92 A 70 °C 4.8 A 60 °C
Maximum Leakage Current	1.5 mA at state 0 120 V AC 60 Hz 3 mA at state 0 240 V AC 60 Hz
Maximum Voltage Drop	<1.5 V at state 1
Insulation Resistance	> 10 MOhm 500 V DC
Response Time On Output	<= 1.011 ms resistive activation <= 1.011 ms resistive deactivation
Typical Current Consumption	79 mA at 3.3 V DC
Mtbf Reliability	1800000 H
Protection Type	1 external fuse fast blow
Inrush Current	20 A
Maximum Current Per Output Common	2.4 A
Output Current Limits	0.025...4.8 A
Status Led	1 LED (green) module operating (RUN) 1 LED per channel (green) channel diagnostic 1 LED (red) module error (ERR) 1 LED (red) module I/O

<b>Ip Degree Of Protection</b>	IP20
<b>Directives</b>	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Environmental Characteristic	Gas resistant class Gx Gas resistant class 3C4 Dust resistant class 3S4 Sand resistant class 3S4 Salt resistant level 2 Mold growth resistant class 3B2 Fungal spore resistant class 3B2
Dielectric Strength	2830 V AC at 50/60 Hz 1 min
Vibration Resistance	3 gn
Shock Resistance	30 gn
Ambient Air Temperature For Storage	-40...85 °C
Ambient Air Temperature For Operation	-25...70 °C
Relative Humidity	5...95 % at 55 °C without condensation
Protective Treatment	Conformal coating
Operating Altitude	0...2000 m 2000...5000 m with derating factor

## Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	5.500 cm
Package 1 Width	11.200 cm
Package 1 Length	11.900 cm
Package 1 Weight	209.000 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	15
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	3.270 kg

## Contractual warranty

Warranty	18 months
----------	-----------

# Sustainability



**Green Premium™ label** is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)


## Well-being performance

 Mercury Free	
 Rohs Exemption Information	<a href="#">Yes</a>
Reach Regulation	<a href="#">REACH Declaration</a>
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	<a href="#">China RoHS declaration</a>
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Modules Mounted on Racks

Dimensions

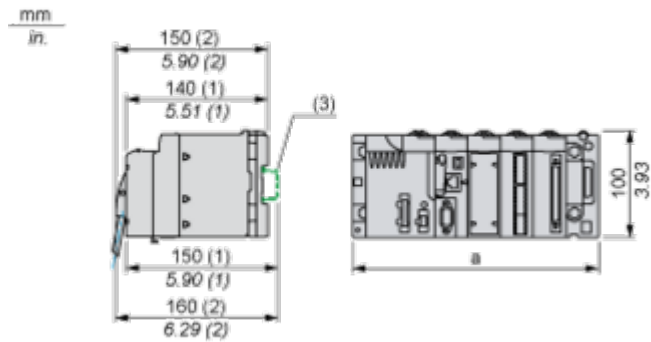


- (1) With removable terminal block (cage, screw or spring).  
(2) With FCN connector.  
(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81


Connections and Schema

Connecting the Module

Output Circuit Diagram

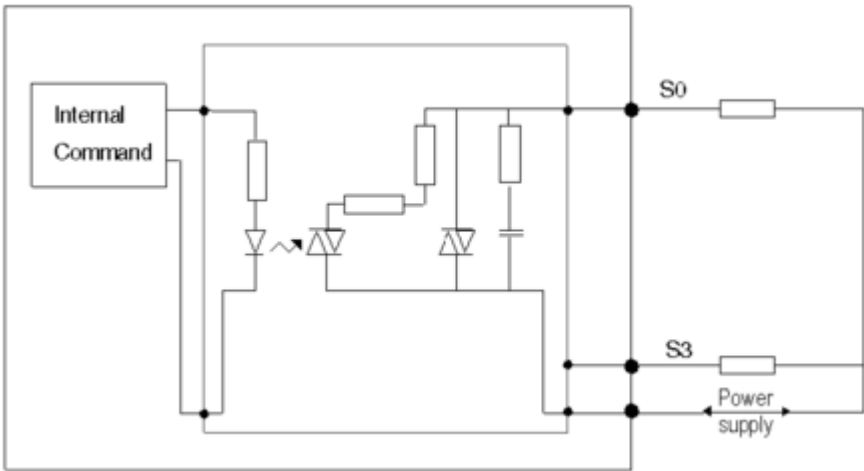

Module Connection

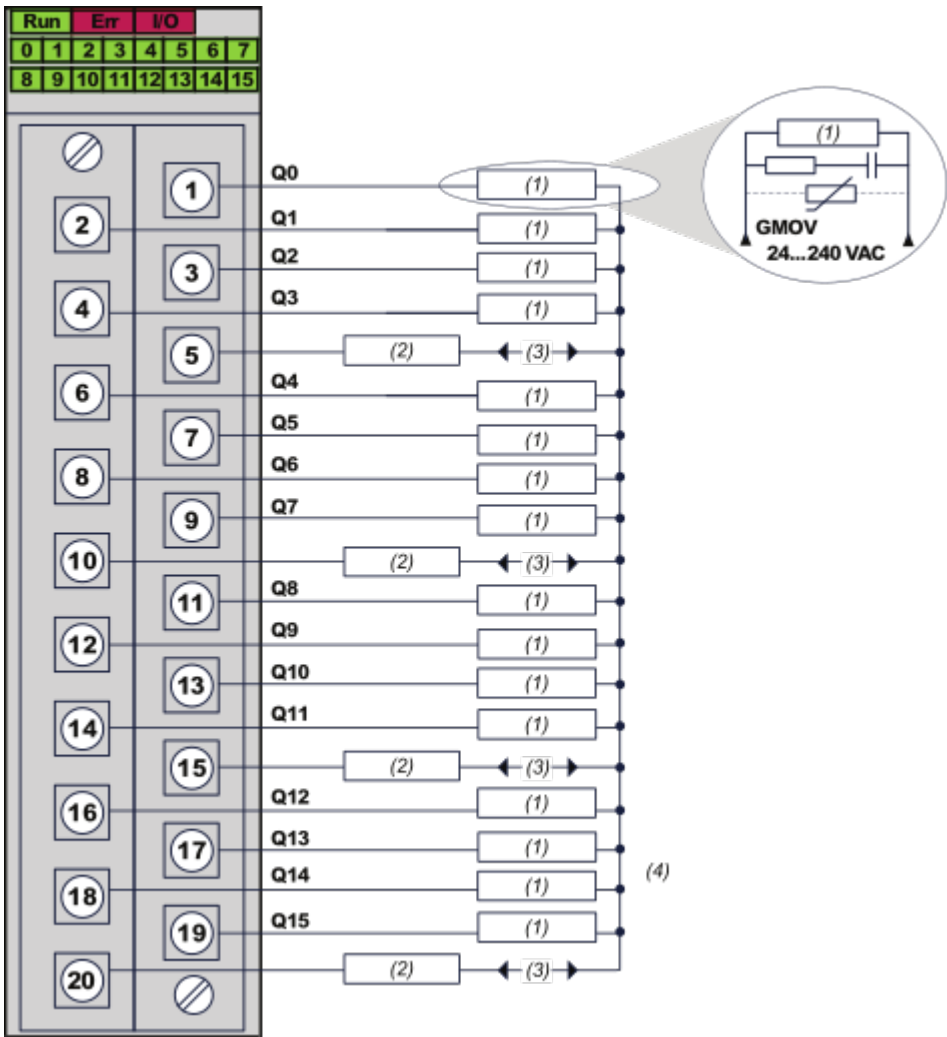

- (1) Pre-actuator
- (2) Fuse : 1 fast blow fuse of 3 A for each 4-channel group
- (3) Power supply : 100...240 VAC
- (4) We recommend installing this type of protection on the terminals of each pre-actuator