

# Product datasheet

Specifications



## discrete input module X80 - 16 inputs - 125 V DC

Local distributor code:  
395510687

BMXDDI1604T

EAN Code: 3595864082196

### Main

Range Of Product	Modicon X80
Product Or Component Type	Discrete input module
Product Specific Application	Extended temperature
Discrete Input Number	16
Discrete Input Type	Isolated
Input Type	Current sink (logic positive)
Discrete Input Voltage	125 V DC, discrete input logic: positive
Discrete Input Current	2.4 mA

### Complementary

Sensor Power Supply	100...150 V
Current State 1 Guaranteed	>= 2 mA
Current State 0 Guaranteed	<= 0.5 mA
Input Impedance	50000 Ohm
Insulation Resistance	> 10 MOhm 500 V DC
Power Dissipation In W	3.2 W 70 °C 5.0 W 60 °C 6.7 W 50 °C 8.5 W 40 °C
Dc Typical Response Time	5 ms
Dc Maximum Response Time	9 ms
Paralleling Of Inputs	Yes
Typical Current Consumption	76 mA at 3.3 V DC
Current Consumption	<= 107 mA at 3.3 V DC
Protection Type	reverse polarity protection fast blow 1 external fuse per group of channel0.5 A
Voltage Detection Threshold	< 80 V DC sensor fault > 100 V DC sensor OK
Status Led	1 LED (green) module operating (RUN) 1 LED per channel (green) channel diagnostic 1 LED (red) module error (ERR) 1 LED (red) module I/O
Net Weight	0.115 kg

### Environment

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ip Degree Of Protection	IP20
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility
Environmental Characteristic	Gas resistant class Gx Gas resistant class 3C4 Dust resistant class 3S4 Sand resistant class 3S4 Salt resistant level 2 Mold growth resistant class 3B2 Fungal spore resistant class 3B2
Dielectric Strength	2500 V AC at 50/60 Hz 1 minute, primary/secondary
Vibration Resistance	3 gn
Shock Resistance	30 gn
Ambient Air Temperature For Storage	-40...85 °C
Ambient Air Temperature For Operation	-25...70 °C
Relative Humidity	5...95 % at 55 °C without condensation
Protective Treatment	Conformal coating
Operating Altitude	0...2000 m 2000...5000 m with derating factor

## Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	5.500 cm
Package 1 Width	11.200 cm
Package 1 Length	11.800 cm
Package 1 Weight	147.000 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	15
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	2.580 kg

## Contractual warranty

Warranty	18 months
----------	-----------

# Sustainability



**Green Premium™ label** is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)


## Well-being performance

 Mercury Free	
 Rohs Exemption Information	<a href="#">Yes</a>
Reach Regulation	<a href="#">REACH Declaration</a>
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	<a href="#">China RoHS declaration</a>
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Modules Mounted on Racks

Dimensions

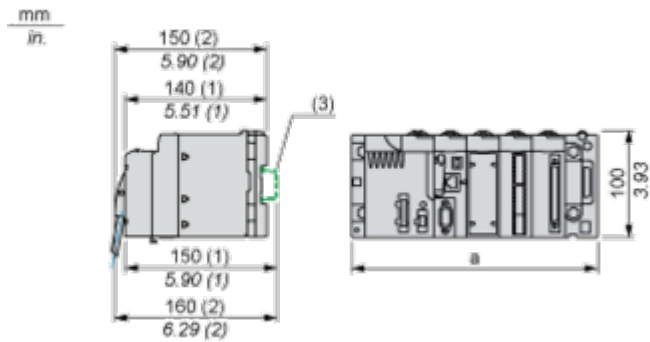


- (1) With removable terminal block (cage, screw or spring).  
(2) With FCN connector.  
(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81

Connections and Schema

Connecting the Module

Input Circuit Diagram

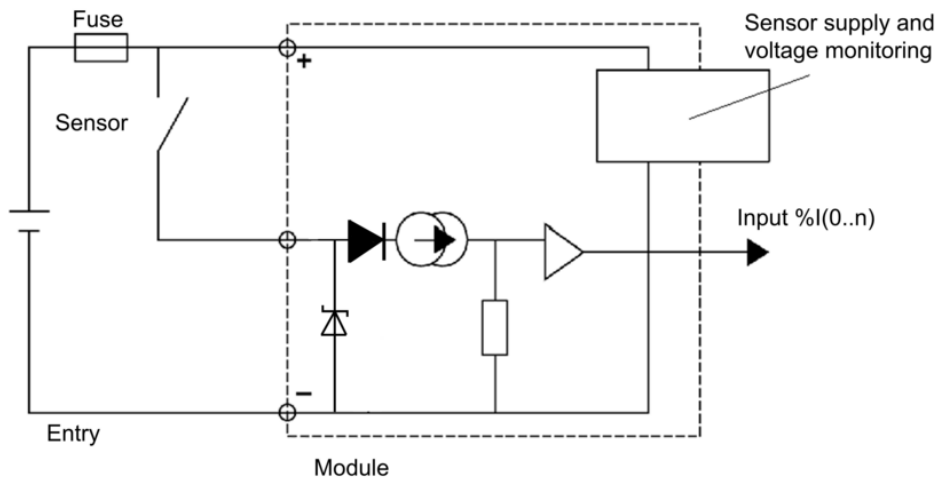

Module Connection

