

Speed monitoring 2 TTL encoder expansion module with screw term

Local distributor code:

407168448 XPSMCMEN0200TT

EAN Code: 3606480748783

Main

| Range Of Product | Preventa Safety automation | |
|---------------------------|------------------------------|--|
| Product Or Component Type | Safe speed monitoring module | |
| Device Short Name | XPSMCM | |
| Electrical Connection | Screw terminal | |
| [Us] Rated Supply Voltage | 24 V - 2020 % DC | |
| Discrete Input Voltage | 24 V DC | |
| Function Of Module | Speed monitoring | |

Complementary

| Oomplementary | | | |
|----------------------------|---|--|--|
| Power Consumption In W | 3 W | | |
| Power Dissipation In W | 3 W | | |
| Integrated Connection Type | Backplane expansion bus | | |
| Safety Level | Can reach category 4 conforming to ISO 13849-1 Can reach PL = e conforming to ISO 13849-1 Type 4 conforming to IEC 61496-1 SILCL 3 conforming to IEC 62061 | | |
| Quality Labels | CE | | |
| Number Of Terminal Blocks | 4 | | |
| Local Signalling | 1 LED green with PWR marking for power ON 1 LED green with RUN marking for RUN (status) 1 LED red with E IN marking for internal error 1 LED red with E EX marking for external error 2 LEDs orange with ADDR marking for node address 2 LEDs yellow with PROX marking for proximity sensors connection status 2 LEDs yellow with SH marking for speed monitoring status 2 LEDs yellow with ENC marking for encoder connection status | | |
| Connections - Terminals | 2 captive screw clamp terminals, removable terminal block 1 captive screw clamp terminals, removable terminal block | | |
| Maximum Input Frequency | 5 kHz for sensor 500 kHz for encoder TTL | | |
| Sensor Type | Inductive proximity sensor | | |
| Electrical Connection | 1 connector RJ45 conforming to EIA/TIA-568-A | | |
| Cable Cross Section | 0.22.5 mm² flexible cablewithout cable end 0.22.5 mm² solid cablewithout cable end 0.252.5 mm² flexible cablewith cable end, with bezel 0.252.5 mm² flexible cablewith cable end, without bezel 0.21.5 mm² flexible cablewithout cable end 0.251 mm² flexible cablewith cable end, without bezel 0.51 mm² flexible cablewith cable end, with double bezel 0.51 mm² solid cablewithout cable end | | |
| Mounting Support | Omega 35 mm DIN rail conforming to EN 50022 | | |

| Depth | 22.5 mm |
|------------|----------|
| Height | 99 mm |
| Width | 114.5 mm |
| Net Weight | 0.3 kg |

Environment

| Standards | IEC 61508 IEC 61800-5-1 ISO 13849-1 IEC 62061 IEC 61496-1 | |
|--|--|--|
| Product Certifications | TÜV cULus RCM | |
| Ip Degree Of Protection | IP20 (enclosure) | |
| Ambient Air Temperature For Operation | -1055 °C | |
| Ambient Air Temperature For Storage | -2085 °C | |
| Relative Humidity | 1095 % | |
| Pollution Degree | 2 | |
| [Uimp] Rated Impulse Withstand Voltage | 4 kV conforming to IEC 61800-5 | |
| Insulation | 250 V AC between power supply and housing conforming to IEC 61800-5-1 | |
| Overvoltage Category | Ш | |
| Electromagnetic Compatibility | Electrostatic discharge immunity test - test level: 6 kV (on contact) conforming to IEC 61000-4-2 Electrostatic discharge immunity test - test level: 20 kV (on air) conforming to IEC 61000-4-2 Susceptibility to electromagnetic fields - test level: 10 V/m (801000 MHz) conforming to IEC 61000-4-3 Susceptibility to electromagnetic fields - test level: 30 V/m (1.4 GHz2 GHz) conforming to IEC 61000-4-3 | |
| Vibration Resistance | +/-0.35 mm (f= 1055 Hz) conforming to IEC 61496-1 | |
| Shock Resistance | 10 gn (duration = 16 ms) for 1000 shocks on each axis conforming to IEC 61496-1 | |
| Service Life | 20 year(s) | |

Packing Units

| Unit Type Of Package 1 | PCE |
|------------------------------|----------|
| J. 0 | |
| Number Of Units In Package 1 | 1 |
| Package 1 Height | 4.4 cm |
| Package 1 Width | 12.8 cm |
| Package 1 Length | 16.2 cm |
| Package 1 Weight | 248.0 g |
| Unit Type Of Package 2 | S01 |
| Number Of Units In Package 2 | 6 |
| Package 2 Height | 15.0 cm |
| Package 2 Width | 15.0 cm |
| Package 2 Length | 40.0 cm |
| Package 2 Weight | 1.729 kg |

Contractual warranty

Warranty

19 Apr 2024

18 months

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >


Well-being performance

| Reach Free Of Svhc | |
|----------------------------|---|
| Mercury Free | |
| Rohs Exemption Information | Yes |
| Pvc Free | |
| | |
| Reach Regulation | REACh Declaration |
| Eu Rohs Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| China Rohs Regulation | China RoHS declaration |
| Weee | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

Dimensions Drawings

Dimensions

Screw Terminal

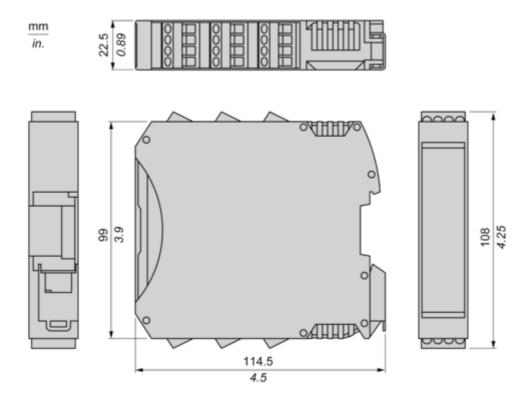


Product datasheet


XPSMCMEN0200TT

Mounting and Clearance

Mounting Safety Controller CPU with Module(s)

Mount BackPlane Connector on Rail








- 1 : Connect as much Backplane Connector as module to be install.
- 2 : Fix the connectors to the rail (Top first).

Mount Safety Controller CPU with Other Module(s)








- 1 : Mount controller CPU and modules on rail.
- ${\bf 2}: {\sf Make \ sure \ that \ the \ controller \ CPU \ or \ the \ module(s) \ are \ plugged \ on \ the \ BackPlane \ connector.}$

XPSMCMEN0200TT

Connections and Schema

Wiring

Terminal Designation

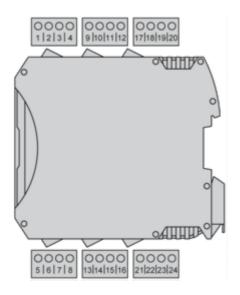

| Terminal | Signal | Description |
|----------|---------------|-------------------------|
| 1 | 24 VDC | 24 VDC power supply |
| 2 | NODE_ADDR0 | Node selection |
| 3 | NODE_ADDR1 | |
| 4 | 0 VDC | 0 Vdc power supply |
| 5 | PROXY1_24V | |
| 6 | PROXY1_REF | PROXIMITY 1 connections |
| 7 | PROXY1_NO | |
| 8 | PROXY1_NC | |
| 9 | PROXY2_24V | PROXIMITY 2 connections |
| 10 | PROXY2_REF | |
| 11 | PROXY2_NO | |
| 12 | PROXY2_NC | |
| 13 | | not connected |
| 14 | not connected | |
| 15 | not connected | |
| 16 | | |

Product datasheet XPSMCMEN0200TT