Specifications





# Head for illuminated selector switch, Harmony XB4, metal, white handle, 22mm, universal LED, 2 positions, stay put

Local distributor code: 237117410

ZB4BK1213

Important message: A change in appearance may be noted on the product but does not affect its use in terms of function and safety. This makes it compatible with our Universal LED blocks EAN Code: 3389110890426

### Main

Range Of Product	Harmony XB4				
Product Or Component Type	Head for illuminated selector switch				
Product Compatibility	Universal LED				
Device Short Name	ZB4				
Bezel Material	Chromium plated metal				
Head Type	Standard				
Mounting Diameter	22 mm				
Sale Per Indivisible Quantity	1				
Shape Of Signaling Unit Head	Round				
Type Of Operator	stay put				
Operator Profile	White standard handle				
Operator Position Information	2 positions 90°				

# Complementary

· · · · · · · · · · · · · · · · · · ·					
Cad Overall Width	29 mm 29 mm				
Cad Overall Height					
Cad Overall Depth	43 mm				
Net Weight	0.036 kg				
Resistance To High Pressure Washer	7000000 Pa at 55 °C, distance : 0.1 m				
Mechanical Durability	1000000 cycles				
Electrical Composition Code	M3 for <4 contacts using single blocks in front mounting with integral LED M6 for <2 contacts using single blocks in front mounting with integral LED and transformer M10 for <2 contacts using single blocks in front mounting with integral LED M4 for <4 contacts using single and double blocks in front mounting with integral LED				
Device Presentation	Basic element				

# Environment

Protective Treatment	тн
Ambient Air Temperature For Storage	-4070 °C
Ambient Air Temperature For Operation	-4070 °C

Overvoltage Category	Class I conforming to IEC 60536 IP66 conforming to IEC 60529 IP67 IP69 IP69K		
Ip Degree Of Protection			
Nema Degree Of Protection	NEMA 13 NEMA 4X		
Ik Degree Of Protection	IK04 conforming to IEC 50102		
Standards	EN/IEC 60947-5-1 JIS C8201-5-1 UL 508 EN/IEC 60947-5-5 EN/IEC 60947-1 CSA C22.2 No 14 EN/IEC 60947-5-4 JIS C8201-1		
Product Certifications	UL listed BV DNV GL LROS (Lloyds register of shipping) CSA		
Vibration Resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6		
Shock Resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27		

# **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	3.500 cm
Package 1 Width	5.300 cm
Package 1 Length	5.400 cm
Package 1 Weight	41.000 g
Unit Type Of Package 2	\$03
Number Of Units In Package 2	250
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	10.889 kg
Unit Type Of Package 3	P06
Number Of Units In Package 3	2000
Package 3 Height	75.000 cm
Package 3 Width	60.000 cm
Package 3 Length	80.000 cm
Package 3 Weight	97.004 kg

# **Contractual warranty**

Warranty

18 months

# Sustainability Screen Premium

**Green Premium<sup>TM</sup> label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

# Well-being performance


Reach Free Of Svhc
Toxic Heavy Metal Free
Mercury Free
Rohs Exemption Information Yes

### **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information


### **Dimensions Drawings**

### Dimensions

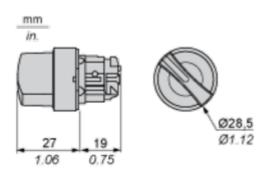


Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

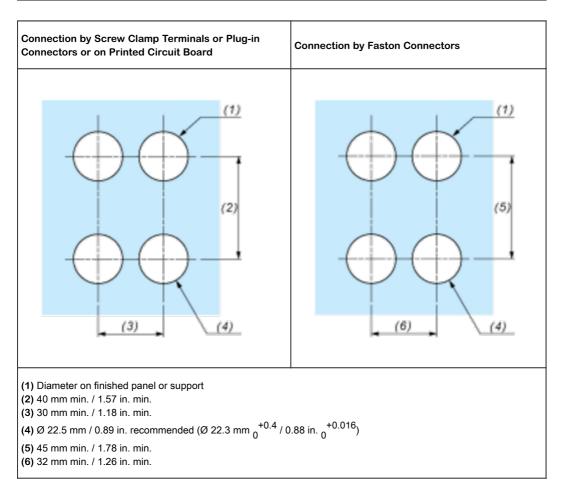

#### Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

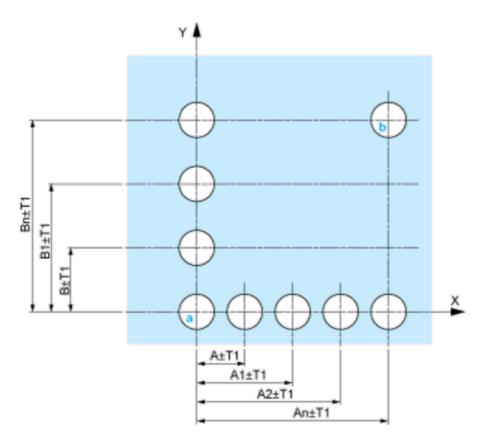


**A:** 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

### Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

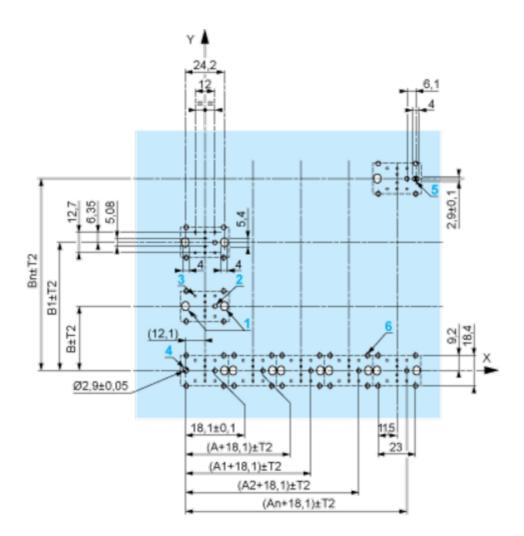

A: 30 mm min. B: 40 mm min. Dimensions in in.

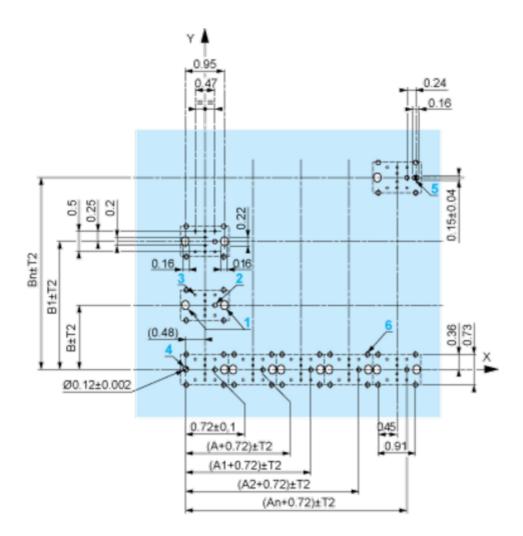

**A:** 1.18 in. min. **B:** 1.57 in. min.


#### General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

#### Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2<sup>°</sup>30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
  - $_{\circ}$  every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
    - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

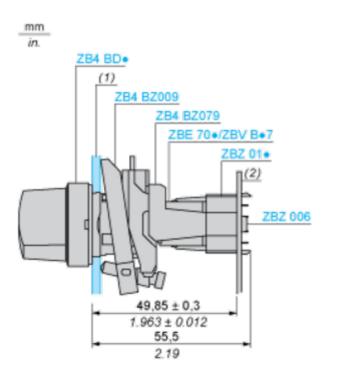

(1) Panel

(2) Printed circuit board


#### Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- $_{\bullet}$  2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01-
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•


Dimensions An + 18.1 relate to the Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 holes for centring adapter ZBZ 01•.

**Technical Description** 

Electrical Composition Corresponding to Code M3



Electrical Composition Corresponding to Code M4



Electrical Composition Corresponding to Codes M6 and P2



Electrical Composition Corresponding to Codes M5, M10, MF1, MR1 and MF2



#### Legend

Single contact



Double contact



Light block




Possible location



### Sequence of Contacts Fitted to 2-position Selector Switch Body

#### Position 315°



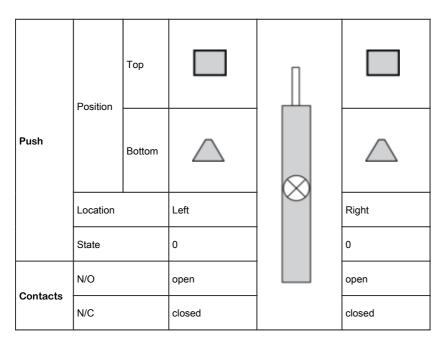

#### Position 45°



		Тор		_	
Push	Position	Bottom			
	Location	•	Left	$\otimes$	Right
	State		1		1
	N/O		closed		closed
Contacts	N/C		open		open