# **Product datasheet**

Specification





# Head for pilot light, Harmony XB4, metal, blue, 22mm, universal LED, plain lens

Local distributor code:

237103712 ZB4BV063

Important message: A change in appearance may be noted on the product but does not affect its use in terms of function and safety. This makes it compatible with our Universal LED blocks EAN Code: 3389110895018

#### Main

Range Of Product	Harmony XB4	
Product Or Component Type	Head for pilot light	
Product Compatibility	Universal LED	
Device Short Name	ZB4	
Bezel Material	Chromium plated metal	
Mounting Diameter	22 mm	
Sale Per Indivisible Quantity	1	
Head Type	Standard	
Shape Of Signaling Unit Head	Round	
Cap/Operator Or Lens Colour	r Blue	
Operator Additional Information	n With plain lens	

# Complementary

Cad Overall Width	29 mm	
Cad Overall Height	29 mm	
Cad Overall Depth	30 mm	
Net Weight	0.026 kg	
Resistance To High Pressure Washer	7000000 Pa at 55 °C, distance : 0.1 m	
<b>Electrical Composition Code</b>	P1 in front mounting with integral LED P2 in front mounting with integral LED and transformer	
Device Presentation	Basic element	

# **Environment**

Protective Treatment	TH	
Ambient Air Temperature For Storage	-4070 °C	
Ambient Air Temperature For Operation	-4070 °C	
Overvoltage Category	Class I conforming to IEC 60536	
lp Degree Of Protection	IP66 conforming to IEC 60529 IP67 IP69 IP69K	

Nema Degree Of Protection	NEMA 13 NEMA 4X	
Ik Degree Of Protection	IK06 conforming to IEC 50102	
Standards	JIS C8201-5-1 UL 508 EN/IEC 60947-1 CSA C22.2 No 14 EN/IEC 60947-5-4 EN/IEC 60947-5-1 EN/IEC 60947-5-5 JIS C8201-1	
Vibration Resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6	
Shock Resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27	

# **Packing Units**

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	5.400 cm
Package 1 Width	3.400 cm
Package 1 Length	4.400 cm
Package 1 Weight	28.000 g
Unit Type Of Package 2	S03
Number Of Units In Package 2	300
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	8.807 kg
Unit Type Of Package 3	P06
Number Of Units In Package 3	2400
Package 3 Height	75.000 cm
Package 3 Width	60.000 cm
Package 3 Length	80.000 cm
Package 3 Weight	79.828 kg

# **Contractual warranty**

Warranty 18 months



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

# Well-being performance

<b>⊘</b>	Reach Free Of Svhc	
<b>Ø</b>	Toxic Heavy Metal Free	
<b>⊘</b>	Mercury Free	
<b>⊘</b>	Rohs Exemption Information	Yes


#### **Certifications & Standards**

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

# **ZB4BV063**

**Dimensions Drawings** 

# **Dimensions**




# **ZB4BV063**

#### Mounting and Clearance

#### Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in **Connection by Faston Connectors Connectors or on Printed Circuit Board** (1)(2)



(1) Diameter on finished panel or support

(3)


- (2) 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm  $_0^{+0.4}$  / 0.88 in.  $_0^{+0.016}$ )

(4)

- (5) 45 mm min. / 1.78 in. min.
- (6) 32 mm min. / 1.26 in. min.

# Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

#### Panel Cut-outs (Viewed from Installer's Side)

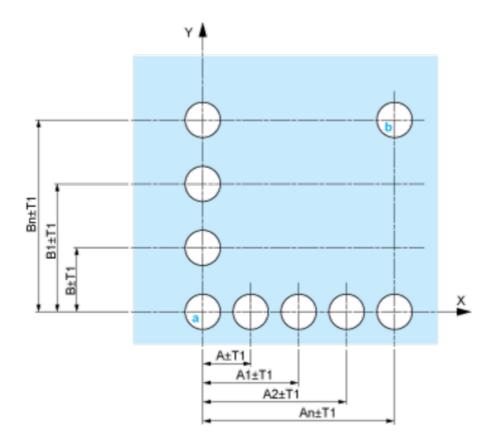


**A:** 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.


Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

# **ZB4BV063**

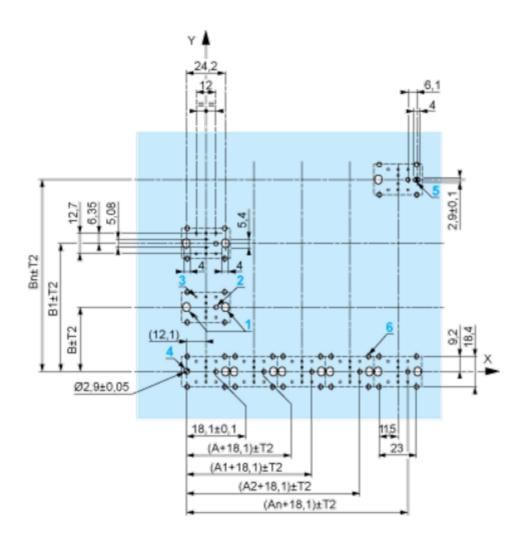

A: 30 mm min. B: 40 mm min. Dimensions in in.

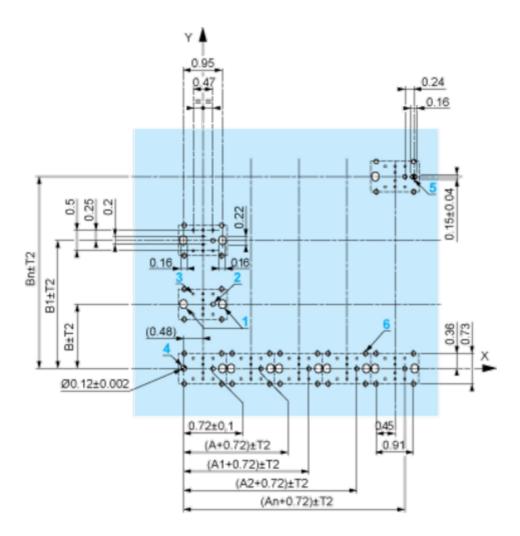

**A:** 1.18 in. min. **B:** 1.57 in. min.


#### General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

#### **Installation Precautions**

- $_{\bullet}$  Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2°30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
  - $_{\circ}\;$  every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

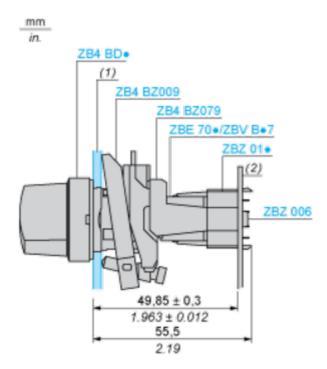

- (1) Panel
- (2) Printed circuit board

#### Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the  $\varnothing$  2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ 01•.

# **Product datasheet**

# **ZB4BV063**

**Technical Description** 

Electrical Composition Corresponding to Codes P1, P3, PF1, PR1 and PF2

Light block



# **Electrical Composition Corresponding to Codes M6 and P2**



# Legend

Single contact



Double contact



Light block



Possible location

