Specifications





selector switch head Ø22 2position spring return Ronis 458A

Local distributor code: 237199755

ZB5AG610

EAN Code: 3389110135268

Main

Range Of Product	Harmony XB5			
Product Or Component Type	Head for key selector switch			
Device Short Name	ZB5			
Bezel Material	Dark grey plastic			
Mounting Diameter	22 mm			
Head Type	Standard			
Sale Per Indivisible Quantity	1			
Shape Of Signaling Unit Head	Round			
Type Of Operator	Right to left spring return			
Operator Profile	Black key switch			
Operator Position Information	2 positions 90°			
Type Of Keylock	Key 458A			
Key Withdrawal Position	Left			

Complementary

Cad Overall Width	29 mm			
Cad Overall Height	29 mm			
Cad Overall Depth	72 mm			
Net Weight	0.061 kg			
Mechanical Durability	1000000 cycles			
Station Name	XALD 15 cut-outs			
	XALK 25 cut-outs			
Electrical Composition Code	C4 for <6 contacts using single and double blocks in front mounting			
	C5 for <5 contacts using single blocks in front mounting			
	C6 for <5 contacts using single and double blocks in front mounting			
	C7 for <4 contacts using single blocks in front mounting			
	C8 for <4 contacts using single and double blocks in front mounting			
	C11 for <3 contacts using single blocks in front mounting			
	C3 for <6 contacts using single blocks in front mounting			
	SF1 for <3 contacts using single blocks in front mounting			
	SR1 for <3 contacts using single blocks in rear mounting			
	C15 for <1 contacts using single blocks in front mounting			
Device Presentation	Basic element			

Environment

Protective Treatment

ΤН

Life Is On Schneider

Ambient Air Temperature For Storage	-4070 °C			
Ambient Air Temperature For Operation	-4070 °C			
Overvoltage Category	Class II conforming to IEC 60536			
Ip Degree Of Protection	IP66 conforming to IEC 60529 IP67 IP69 IP69K			
Nema Degree Of Protection	NEMA 13 NEMA 4X			
Resistance To High Pressure Washer	7000000 Pa at 55 °C, distance : 0.1 m			
Ik Degree Of Protection	IK06 conforming to IEC 50102			
Standards	UL 508 EN/IEC 60947-1 CSA C22.2 No 14 EN/IEC 60947-5-4 EN/IEC 60947-5-1 JIS C8201-5-1 JIS C8201-1			
Product Certifications	UL listed LROS (Lloyds register of shipping) GL DNV BV CSA			
Vibration Resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6			
Shock Resistance 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27				

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	5.33 cm
Package 1 Width	3.56 cm
Package 1 Length	8.89 cm
Package 1 Weight	0.07 kg
Unit Type Of Package 2	S02
Number Of Units In Package 2	50
Package 2 Height	15 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	3.81 kg
Package 3 Height	15.0 cm

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Mercury Free


Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Dimensions Drawings


Dimensions

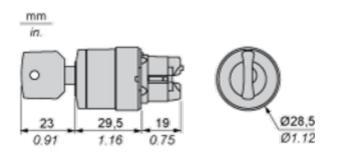

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

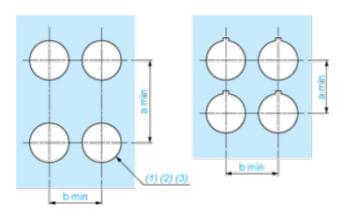


(1) Diameter on finished panel or support

(2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended. (3) \emptyset 22.5 mm recommended (\emptyset 22.3 $_0^{+0.4}$) / \emptyset 0.89 in. recommended (\emptyset 0.88 in. $_0^{+0.016}$)

				0 .
Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18

Detail of Lug Recess




(1) Diameter on finished panel or support

- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) \emptyset 22.5 mm recommended (\emptyset 22.3 $_0^{+0.4}$) / \emptyset 0.89 in. recommended (\emptyset 0.88 in. $_0^{+0.016}$)

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

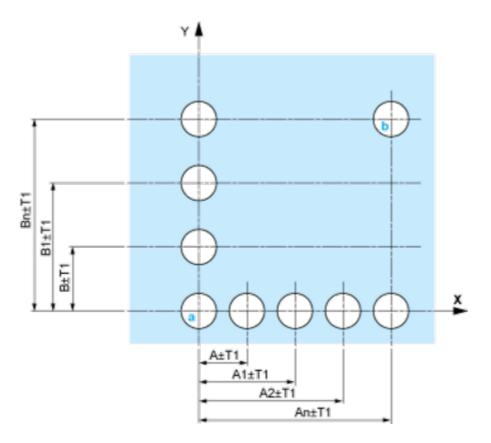


A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

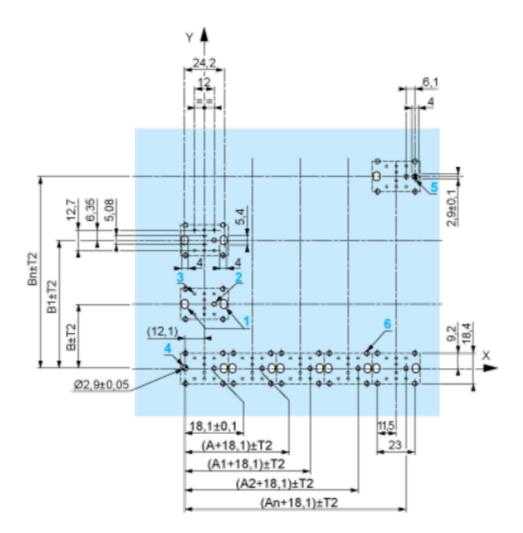

A: 30 mm min. B: 40 mm min. Dimensions in in.

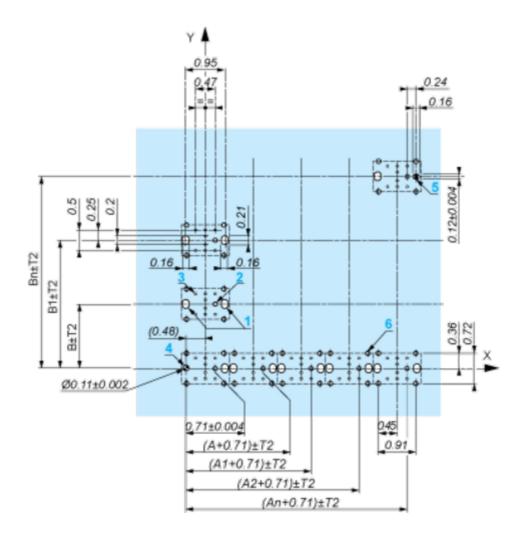

A: 1.18 in. min. **B:** 1.57 in. min.


General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2 30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
 - $_{\circ}$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

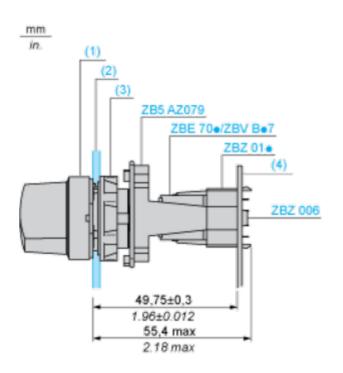

- (1) Head ZB5AD•
- (2) Panel
- (2) Nut
- (4) Printed circuit board


Mounting of Adapter (Socket) ZBZ01•


- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01•
- **3** 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•


Dimensions An + 18.1 relate to the Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 holes for centring adapter ZBZ01•.


Technical Description













Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



Legend

Single contact



Double contact



Light block



Possible location



Sequence of Contacts Fitted to 2-position Selector Switch Body

Position 315°



	Position	Тор			
Push		Bottom	\bigtriangleup	\bigtriangleup	\bigtriangleup
	Location		Left	Centre	Right
	State		0	0	0
Contacto	N/O		open	open	open
Contacts	N/C		closed	closed	closed

Position 45°



	Position	Тор			
Push		Bottom			
	Location		Left	Centre	Right
	State		1	1	1
Contacts	N/O		closed	closed	closed
	N/C		open	open	open