# **Product datasheet**

Specification





# red Ø40 Emergency stop, switching off head Ø22 trigger and latching key release

ZB5AS94420

Local distributor code: 237189121

① Discontinued on: 15 Jun 2023

① Discontinued

EAN Code: 3389110135145

#### Main

| Range Of Product              | Harmony XB5                            |
|-------------------------------|--|
| Product Or Component Type     | Head for emergency stop push-button    |
| Product Destination           | Emergency stop push-button             |
| Device Short Name             | ZB5                                    |
| Bezel Material                | Dark grey plastic                      |
| Head Type                     | Standard                               |
| Mounting Diameter             | 22 mm                                  |
| Sale Per Indivisible Quantity | 1                                      |
| Shape Of Signaling Unit Head  | Round                                  |
| Type Of Operator              | trigger action and mechanical latching |
| Reset                         | Key release                            |
| Operator Profile              | Red mushroom Ø 40 mm, unmarked         |
| Type Of Keylock               | Key 3131A                              |
| Key Withdrawal Position       | Center                                 |
| Device Presentation           | Basic element                          |

# Complementary

| Cad Overall Width           | 40 mm  |
|-----------------------------|--|
| Cad Overall Height          | 40 mm  |
| Cad Overall Depth           | 79 mm  |
| Net Weight                  | 0.071 kg   |
| Mechanical Durability       | 300000 cycles  |
| Station Name                | XALD 1 cut-out<br>XALK 1 cut-out   |
| Electrical Composition Code | C7 for <4 contacts using single blocks in front mounting C8 for <4 contacts using single and double blocks in front mounting C11 for <3 contacts using single blocks in front mounting C15 for <1 contacts using single blocks in front mounting SF1 for <3 contacts using single blocks in front mounting SR1 for <3 contacts using single blocks in rear mounting C10 for <4 contacts using single and double blocks in front mounting |
| Compatibility Code          | ZB5  |

#### **Environment**

| Protective Treatment                     | тн  |
|--|---|
| Ambient Air Temperature For Storage      | -4070 °C  |
| Ambient Air Temperature For<br>Operation | -4070 °C  |
| Overvoltage Category                     | Class II conforming to IEC 60536  |
| Ip Degree Of Protection                  | IP66 conforming to IEC 60529 IP67 IP69 IP69K  |
| Nema Degree Of Protection                | NEMA 13<br>NEMA 4X  |
| Resistance To High Pressure<br>Washer    | 7000000 Pa at 55 °C, distance : 0.1 m   |
| Ik Degree Of Protection                  | IK03 conforming to IEC 50102  |
| Standards                                | EN/IEC 60947-1 EN/IEC 60947-5-1 EN/IEC 60947-5-4 UL 508 EN/ISO 13850 JIS C8201-5-1 IEC 60364-5-53 CSA C22.2 No 14 GB 14048.5 EN/IEC 60947-5-5 EN/IEC 60204-1 JIS C8201-1    |
| Product Certifications                   | GL<br>LROS (Lloyds register of shipping)<br>DNV<br>CSA<br>BV<br>UL listed   |
| Vibration Resistance                     | 5 gn (f= 2500 Hz) conforming to IEC 60068-2-6   |
| Shock Resistance                         | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27 |

# **Packing Units**

| Unit Type Of Package 1       | PCE    |
|------------------------------|--------|
| Number Of Units In Package 1 | 1      |
| Package 1 Height             | 8.8 cm |
| Package 1 Width              | 4.4 cm |
| Package 1 Length             | 5.4 cm |
| Package 1 Weight             | 71.0 g |

# **Contractual warranty**

Warranty 18 months



**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

## Well-being performance



Mercury Free



Rohs Exemption Information


Yes

### **Certifications & Standards**

| Reach Regulation         | REACh Declaration  |  |  |  |  |
|--------------------------|--|--|--|--|--|
| Eu Rohs Directive        | Pro-active compliance (Product out of EU RoHS legal scope) |  |  |  |  |
| China Rohs Regulation    | China RoHS declaration                                     |  |  |  |  |
| Environmental Disclosure | Product Environmental Profile                              |  |  |  |  |
| Circularity Profile      | End of Life Information                                    |  |  |  |  |

## **Dimensions Drawings**


### **Dimensions**

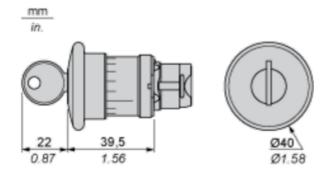

#### Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

#### Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

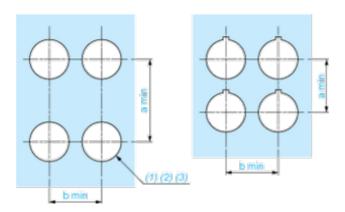

- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3  $_0^{+0.4}$ ) / Ø0.89 in. recommended (Ø0.88 in.  $_0^{+0.016}$ )

| Connections                                   | a in mm | a in in. | b in mm | b in in. |
|---|---------|----------|---------|----------|
| By screw clamp terminals or plug-in connector | 40      | 1.57     | 30      | 1.18     |
| By Faston connectors                          | 45      | 1.77     | 32      | 1.26     |
| On printed circuit board                      | 30      | 1.18     | 30      | 1.18     |


#### **Detail of Lug Recess**



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3  $_0^{+0.4}$ ) / Ø0.89 in. recommended (Ø0.88 in.  $_0^{+0.016}$ )

#### Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


#### Panel Cut-outs (Viewed from Installer's Side)

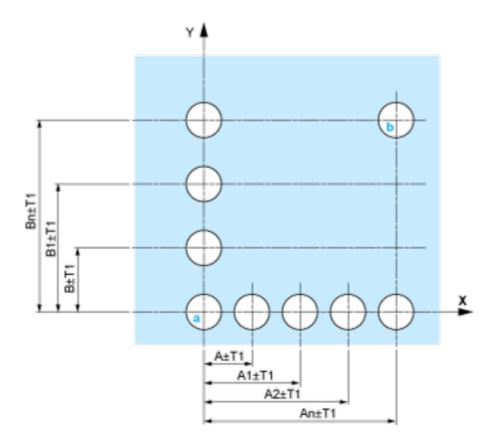


**A:** 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

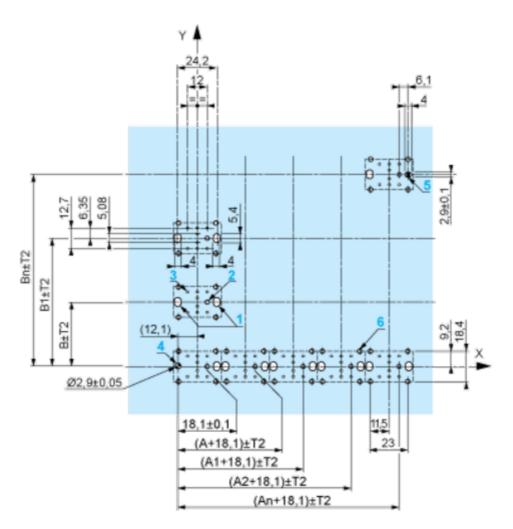

A: 30 mm min. B: 40 mm min. Dimensions in in.

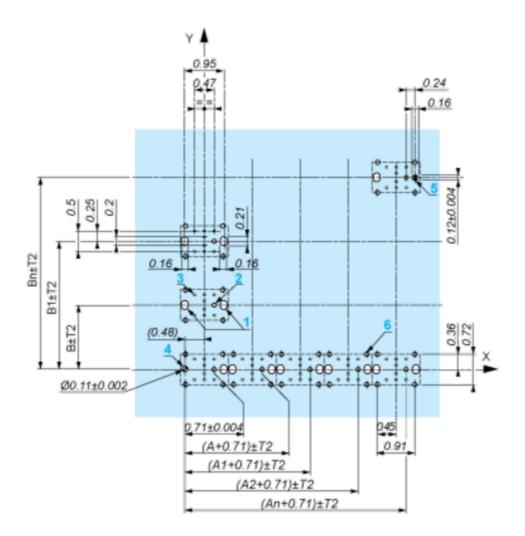

**A:** 1.18 in. min. **B:** 1.57 in. min.


#### General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

#### **Installation Precautions**

- $_{\bullet}$  Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2 30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
  - $_{\circ}\;$  every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - o with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

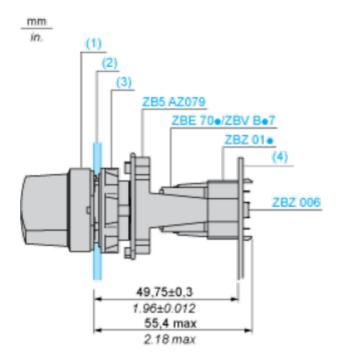

- (1) Head ZB5AD•
- (2) Panel
- (2) Nut
- (4) Printed circuit board

#### Mounting of Adapter (Socket) ZBZ01•

- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•


Dimensions An + 18.1 relate to the Ø 2.4 mm  $\pm$  0.05 / 0.09 in.  $\pm$  0.002 holes for centring adapter ZBZ01•.

# **Product datasheet**


# ZB5AS94420

**Technical Description** 


**Electrical Composition Corresponding to Code C7** 



**Electrical Compositions Corresponding to Code C8** 



**Electrical Compositions Corresponding to Code C10** 



# **Product datasheet**

## ZB5AS94420

**Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1** 



### **Electrical Composition Corresponding to Code C15**

1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



### Legend

Single contact



Double contact



Light block



Possible location

