Product datasheet

Specification





time delay relay 8 functions - 1 s.. 100 h - 24..240 V AC/DC - 1 OC

RE17RMEMU

Local distributor code:

397857322

EAN Code: 3606480552731

Main

Range Of Product	Harmony Timer Relays	
Product Or Component Type	Multifunction relay	
Discrete Output Type	Relay	
Width	17.5 mm	
Device Short Name	RE17R	
Time Delay Type	Power on-delay Interval Off-delay Symmetrical flashing	
Time Delay Range	660 min 110 min 110 s 110 h 660 s 0.11 s	
Nominal Output Current	8 A	

Complementary

1 C/O	
Cadmium free	
90 mm	
72 mm	
Selector switch front panel	
24240 V AC 50/60 Hz 24 V DC	
0.851.1 Us	
5060 Hz +/- 5 %	
10 V	
Screw terminals, 1 x 0.51 x 3.3 mm² (AWG 20AWG 12) solid without cable end Screw terminals, 2 x 0.52 x 2.5 mm² (AWG 20AWG 14) solid without cable end Screw terminals, 1 x 0.21 x 2.5 mm² (AWG 24AWG 14) flexible with cable end Screw terminals, 2 x 0.22 x 1.5 mm² (AWG 24AWG 16) flexible with cable end	
0.61 N.m conforming to IEC 60947-1	
Self-extinguishing	
+/- 0.5 % conforming to IEC 61812-1	
+/- 0.05 %/°C	
+/- 0.2 %/V	

Setting Accuracy Of Time Delay	+/- 10 % of full scale at 25 °C conforming to IEC 61812-1	
Control Signal Pulse Width	100 ms with load in parallel typical 30 ms typical	
Insulation Resistance	100 MOhm at 500 V DC conforming to IEC 60664-1	
Reset Time	120 ms on de-energisation typical	
On-Load Factor	100 %	
Power Consumption In Va	032 VA at 240 V AC	
Maximum Power Consumption In W	0.6 W at 24 V DC	
Minimum Switching Current	10 mA at 5 V DC	
Maximum Switching Current	8 A AC/DC	
Maximum Switching Voltage	250 V AC	
Breaking Capacity	2000 VA	
Operating Frequency	10 Hz	
Electrical Durability	100000 cycles (8 A at 250 V AC maximum) for resistive load	
Mechanical Durability	10000000 cycles	
Dielectric Strength	2.5 kV 1 mA/1 minute 50 Hz conforming to IEC 61812-1	
[Uimp] Rated Impulse Withstand Voltage	5 kV during 1.2/50 μs	
Power On Delay	100 ms	
Marking	CE	
Creepage Distance	4 kV/3 conforming to IEC 60664-1	
Safety Reliability Data	MTTFd = 296.8 years B10d = 270000	
Mounting Position	Any position in relation to normal vertical mounting plane	
Mounting Support	35 mm DIN rail conforming to IEC 60715	
Local Signalling	LED indicator for on steady: relay energised, no timing in progress LED indicator for flashing: timing in progress 80 % ON and 20 % OFF LED indicator for pulsing: relay de-energised, no timing in progress (except function Di-D, Li-L) 5 % ON and 95 % OFF	
Net Weight	0.07 kg	
Number Of Functions	8	
Time Delay Type	A, At, B, C, D, Di, H, Ht	
Functionality	Multifunction	
Compatibility Code	RE17	

Environment

Immunity To Microbreaks	20 ms
Standards	2004/108/EC
	IEC 61000-6-2
	IEC 61000-6-3
	IEC 61000-6-1
	2006/95/EC
	IEC 61812-1
	IEC 61000-6-4
Product Certifications	CSA
	cULus
Ambient Air Temperature For Storage	-3060 °C

Ambient Air Temperature For Operation	-2060 °C
Ip Degree Of Protection	IP20 (terminal block) conforming to IEC 60529 IP40 (housing) conforming to IEC 60529 IP50 (front panel) conforming to IEC 60529
Vibration Resistance	20 m/s² (f= 10150 Hz) conforming to IEC 60068-2-6
Shock Resistance	15 gn for 11 ms conforming to IEC 60068-2-27
Relative Humidity	93 % without condensation conforming to IEC 60068-2-30
Electromagnetic Compatibility	Electrostatic discharge immunity test: (in contact), level 3, 6 kV, conforming to IEC 61000-4-2 Electrostatic discharge immunity test: (in air), level 3, 8 kV, conforming to IEC 61000-4-2 Susceptibility to electromagnetic fields: (80 MHz to 1 GHz), level 3, 10 V/m, conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test: (capacitive connecting clip), level 3, 1 kV, conforming to IEC 61000-4-4 Electrical fast transient/burst immunity test: (direct), level 3, 2 kV, conforming to IEC 61000-4-4 1.2/50 µs shock waves immunity test: (differential mode), level 3, 1 kV, conforming to IEC 61000-4-5 1.2/50 µs shock waves immunity test: (common mode), level 3, 2 kV, conforming to IEC 61000-4-5 Conducted RF disturbances: (0.1580 MHz), level 3, 10 V, conforming to IEC 61000-4-6 Voltage dips and interruptions immunity test: (1 cycle), 0 %, conforming to IEC 61000-4-11 Voltage dips and interruptions immunity test: (25/30 cycles), 70 %, conforming to IEC 61000-4-11 Conducted and radiated emissions: , class B, conforming to EN 55022

Packing Units

•	
Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.800 cm
Package 1 Width	7.800 cm
Package 1 Length	9.600 cm
Package 1 Weight	78.000 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	40
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	3.700 kg

Contractual warranty

Warranty 18 months

Sustainability Green Premium

Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes


Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

17 May 2024

Dimensions Drawings

Width 17.5 mm

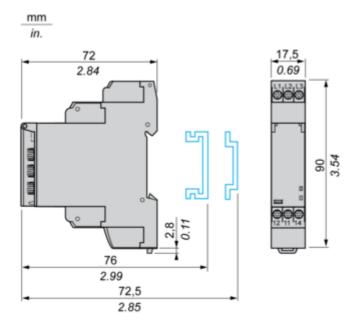


Product datasheet


RE17RMEMU

Connections and Schema

Internal Wiring Diagram

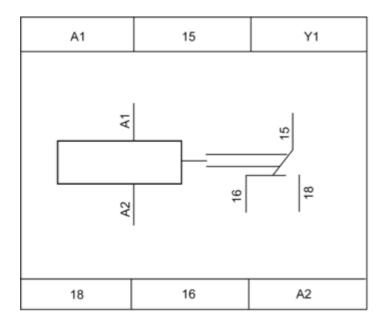

Wiring Diagram



1) Contact Y1:

- $_{\bullet}$ Control for functions B, C, Ac, Bw, Ad, Ah, N, O, W, T, Tt.
- Partial stop for functions At, Ht and Pt.
- Function D if Di selected.
- Not used for functions A, H and P.

Product datasheet

RE17RMEMU

Technical Description

Function A : Power on Delay Relay


Description

The timing period T begins on energisation. After timing, the output(s) R close(s). The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs




Function At: Power on Delay Relay (Summation) with Control Signal

Description

After power-up, the first opening of control contact C starts the timing. Timing can be interrupted each time control contact closes. When the cumulative total of time periods elapsed reaches the pre-set value T, the output relay closes.

Function: 1 Output



T = t1 + t2 +...


Function B : Interval Relay with Control Signal

Description

10

After power-up, pulsing or maintaining control contact C starts the timing T. The output R closes for the duration of the timing period T then reverts to its initial state.

Function: 1 Output




Function C : Off-Delay Relay with Control Signal


Description

After power-up and closing of the control contact C, the output R closes. When control contact C re-opens, timing T starts. At the end of the timing period, the output(s) R revert(s) to its/their initial state. The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs




Function D: Symmetrical Flashing Relay (Starting Pulse Off)


Description

On energisation of power supply, output(s) R starts at its/their initial state for timing duration T then change(s) to output(s) R close(s) for the same timing duration T.This cycle is repeated indefintely until power supply removal.Specially for RE17*, RE22R2AMU, RE22R2MMW, RE22R2MMU, RE22R2MJU,this D function can only be initiated by energizing Y1 permanently.The second output (R2) can be either timed (when set to "TIMED") or instantaneous (when set to "INST").


Function: 1 Output




Function: 2 Outputs



Function: 1 Output with Retrigger / Restart Control



Function: 2 Output with Retrigger / Restart Control



Function Di : Symmetrical Flasher Relay (Starting Pulse On)

Description

Repetitive cycle with two timing periods T of equal duration, with output(s) R changing state at the end of each timing period T.


The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs

17 May 2024



Function H : Interval Relay


Description

On energisation of the relay, timing period T starts and the output(s) R close(s). At the end of the timing period T, the output(s) R revert(s) to its/their initial state. The second output can be either timed or instantaneous.

Function: 1 Output



Function: 2 Outputs



Function Ht: Interval Relay & With Pause / Summation Control

Description

On energisation of power supply, output(s) R close(s) and timing period T starts.


The timing can be interrupted / paused each time X1 energizes.

When the cumulative total of time periods elapsed reaches the pre-set value T, the output(s) R revert(s) to its/their initial state Reenergization of X1 will also cause output(s) R close(s) if the time has elapsed and restart the same operation as described at the beginning.

Except for RE17*, RE22R2MMW, RENF22R2MMW, RE22R2MMU and RE22R2MJU, timing can be interrupted / paused each time Y1 energizes.


The second output (R2) can be either timed (when set to "TIMED" or instantaneous (when set to "INST").

Function: 1 Output




T = t1 + t2 +...

Function: 2 Outputs




T = t1 + t2 +...

Function: 1 Output with Retrigger / Restart Control



T = t1 + t2 +...

Function: 2 Outputs with Retrigger / Restart Control



T = t1 + t2 +...

17 May 2024

Legend

