

# Product datasheet

Specifications



## Profibus DP diagnostics expansion module with screw term

Local distributor code:  
407168079 XPSMCMCO0000PB

EAN Code: 3606480748486

### Main

Range Of Product	Modicon MCM
Product Or Component Type	Non-safe communication module
Device Short Name	XPSMCM
[Us] Rated Supply Voltage	24 V - 20...20 % DC

### Complementary

Power Dissipation In W	3 W
Quality Labels	CE
Range Compatibility	Preventa XPSMCM
Connector Type	female SUB-D 9
Number Of Port	1
Method Of Access	Server
Transmission Rate	500 kbit/s 9.6 kbit/s 19.2 kbit/s 45.45 kbit/s 93.75 kbit/s 187.5 kbit/s 1.5 kbit/s 3 Mbit/s 6 Mbit/s 12 Mbit/s
Communication Port Protocol	Profibus DP
Current Consumption	0.125 mA
Maximum Cable Distance Between Devices	1000 m 100 m 1200 m 400 m 200 m
Local Signalling	LED green with PWR marking for power ON LED green with RUN marking for operating LED red with E IN marking for internal error LED red with E EX marking for external error LED green/red with STS marking for communication status LED green/red with Mode marking for connection state
Connections - Terminals	2 captive screw clamp terminals, removable terminal block
Cable Cross Section	0.2...1.5 mm² - AWG 24...AWG 16 flexible cablewithout cable end 0.2...2.5 mm² - AWG 24...AWG 14 flexible cablewithout cable end 0.25...1 mm² - AWG 23...AWG 18 flexible cablewith cable end, without bezel 0.25...2.5 mm² - AWG 23...AWG 14 flexible cablewith cable end, with bezel 0.25...2.5 mm² - AWG 23...AWG 14 flexible cablewith cable end, without bezel 0.5...1.5 mm² - AWG 20...AWG 16 flexible cablewith cable end, with double bezel 0.2...1 mm² - AWG 24...AWG 18 solid cablewithout cable end 0.2...2.5 mm² - AWG 24...AWG 14 solid cablewithout cable end

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Mounting Support	Omega 35 mm DIN rail conforming to EN 50022
Width	22.5 mm
Height	99 mm
Depth	114.5 mm
Net Weight	0.3 kg

## Environment

Product Certifications	cULus RCM TÜV
Ip Degree Of Protection	IP20
Ambient Air Temperature For Operation	-10...55 °C
Ambient Air Temperature For Storage	-20...85 °C
Relative Humidity	10...95 %
Pollution Degree	2
Insulation	250 V AC between power supply and housing conforming to IEC 61800-5-1
Overvoltage Category	II
Electromagnetic Compatibility	Electrostatic discharge immunity test - test level: 6 kV (on contact) conforming to IEC 61000-4-2 Electrostatic discharge immunity test - test level: 20 kV (on air) conforming to IEC 61000-4-2 Susceptibility to electromagnetic fields - test level: 10 V/m (80...1000 MHz) conforming to IEC 61000-4-3 Susceptibility to electromagnetic fields - test level: 30 V/m (1.4 GHz...2 GHz) conforming to IEC 61000-4-3
Vibration Resistance	+/-0.35 mm (f= 10...55 Hz) conforming to IEC 61496-1
Shock Resistance	10 gn (duration = 16 ms) for 1000 shocks on each axis conforming to IEC 61496-1
Operating Altitude	2000 m
Service Life	20 year(s)

## Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	4.5 cm
Package 1 Width	12.8 cm
Package 1 Length	16.2 cm
Package 1 Weight	213.0 g
Unit Type Of Package 2	S01
Number Of Units In Package 2	6
Package 2 Height	15.0 cm
Package 2 Width	15.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	1.515 kg

## Contractual warranty

Warranty	18 months
----------	-----------

## Sustainability





**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)


## Well-being performance

 Reach Free Of Svhc	
 Mercury Free	
 Rohs Exemption Information	<a href="#">Yes</a>
 Pvc Free	
<b>Reach Regulation</b>	<a href="#">REACH Declaration</a>
<b>Eu Rohs Directive</b>	Pro-active compliance (Product out of EU RoHS legal scope)
<b>China Rohs Regulation</b>	<a href="#">China RoHS declaration</a>
<b>Weee</b>	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions


Screw Terminal

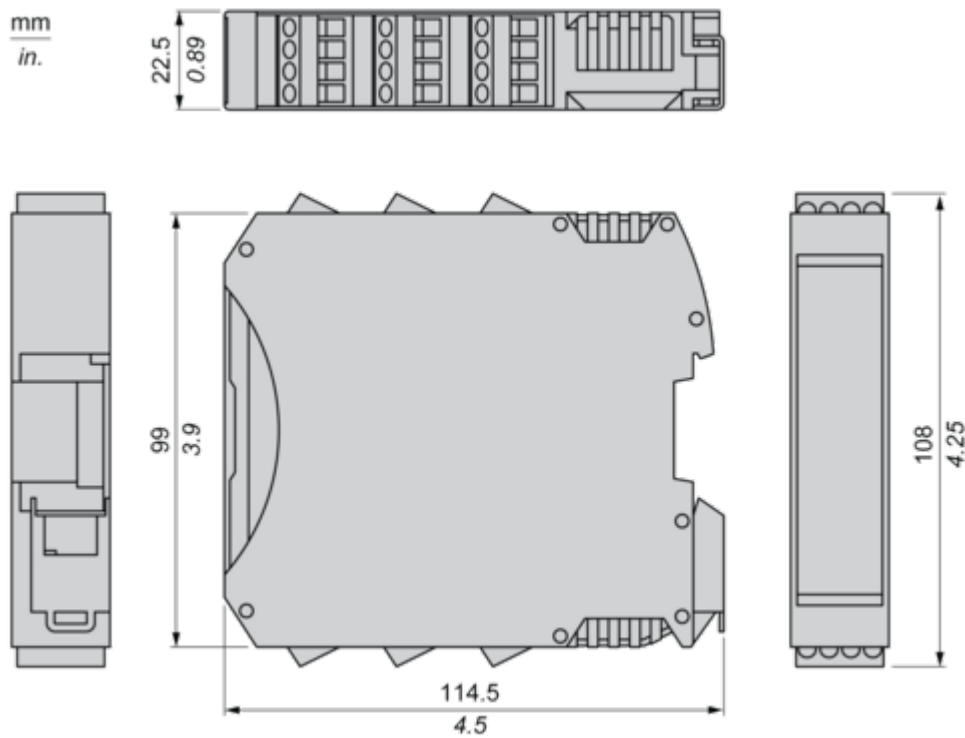

Mounting and Clearance


Mounting Safety Controller CPU with Module(s)

Mount BackPlane Connector on Rail

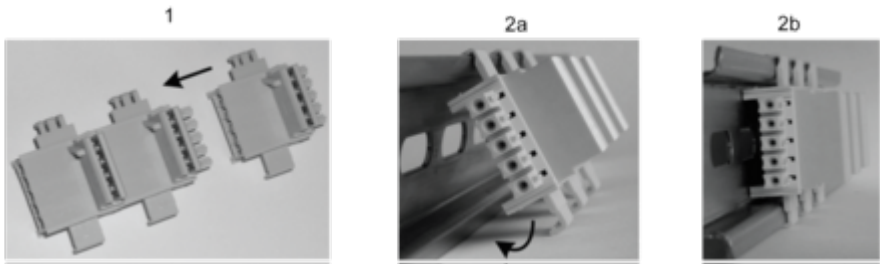

- 1 : Connect as much Backplane Connector as module to be install.  
2 : Fix the connectors to the rail (Top first).

Mount Safety Controller CPU with Other Module(s)

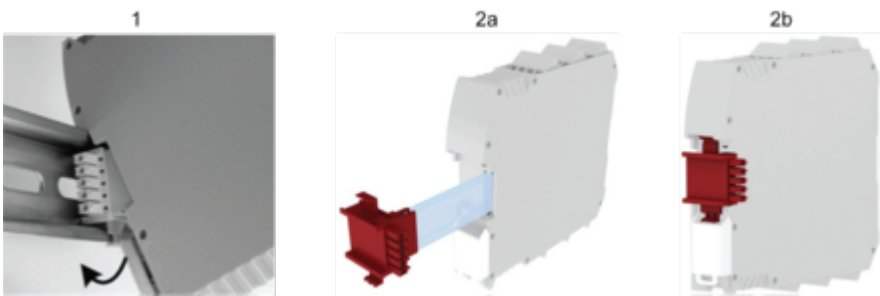

- 1 : Mount controller CPU and modules on rail.  
2 : Make sure that the controller CPU or the module(s) are plugged on the BackPlane connector.

Connections and Schema

Connection & Schema


PROFIBUS DP Connector



Description	PBUS (PROFIBUS DP) standard communication device
Wiring	<div>PIN/Signal/ Description</div> <div>1/ not connected</div> <div>2/ not connected</div> <div>3 / B Line / Positive RxD/TxD, RS485 level</div> <div>4 / RTS / Request to send</div> <div>5 / GND Bus/ ground (isolated)</div> <div>6 / +5 V Bus Output / +5V termination power (isolated, short-circuit protected)</div> <div>7 / not connected</div> <div>8 / A Line /Negative RxD/TxD, RS485 level</div> <div>9 / not connected housing / cable Shield / Internally connected to the protective earth via cable shield filters according to the PROFIBUS standard</div>
Data sets	<div>Input status, input diagnostics,</div> <div>fieldbus input status, probe status,</div> <div>safety output status, safety output diagnostics</div>

Wiring

Terminal Designation

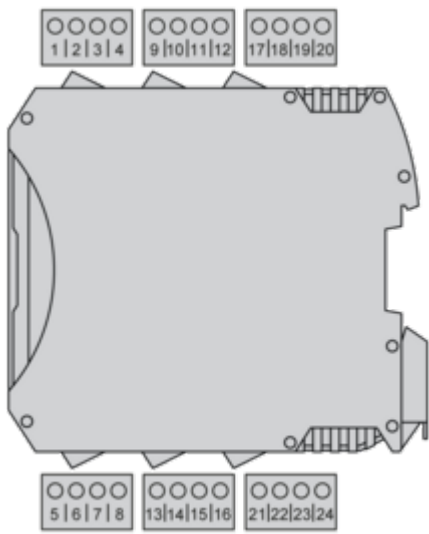

Terminal	Signal	Description
1	24 VDC	24 Vdc power supply
2	-	Not connected
3		
4	0 VDC	0 Vdc power supply
5	-	Not connected
6		
7		
8		

Wiring Example

